
	SHEET INFORMATION											PACK REVISIONS
DRAWING No.	DRAWING SHEETS	0	1	2	3	4 5	6	7	8	9 1	0 1:	LATEST REVISION NOTE
160	Slab Penetration Layout	-	-	-								
201	Structural Layout Ground Floor	-	-	-								
202	Structural Layout First Floor	-	-	Α								Bedroom 2 optional built in wardrobe opening increased to 1400mm
211	Structural Layout Ground Floor - Opp	-	-	-								
212	Structural Layout First Floor - Opp	-	-	Α					 			Bedroom 2 optional built in wardrobe opening increased to 1400mm
301	Section A-A	-	-	-			_					
302 401	Section B-B Elevations A1	-	-	_					+ +			Window openers amended
501	Staircase Details 1 of 2		-	Δ			-	-	+ +		-	Stairs tread depths updated, joists amended to suit, path line added
502	Staircase details 1 of 2			Α								Stairs tread depths updated, joists amended to suit, path line added
601	Services Layout Ground Floor		H	Δ	-		-	+			-	PIR added in Hall
602	Services Layout First Floor		-	_								Tirk daded in ridii
611	Services Layout Ground Floor - Opp	_	-	Δ								PIR added in Hall
612	Services Layout First Floor - Opp	_	-	-								
701	Cloaks Details	_	-	_								
702	Bathroom Details	-	-	-								
703	Ensuite Details	-	-	-								
750	Kitchen Layout	-	-	-								
760	Optional Lighting Layout Ground Floor	-	-	-			1					
761	Optional Lighting Layout First Floor	-	-	-								
801	Canopy Details	-	_	Α								Weep holes added. Section D-D handed cavity trays added
							_					
						_	-				_	
	OLR INFORMATION											
	OLR - Ground Floor	-	-	-								
	OLR - First Floor	-	-	Α								Bedroom 2 optional built in wardrobe opening increased to 1400mm
	OLR - Elevations A1	-	-	Α								Window openers amended
	OLR - PEA	-	-	-								
COMPANY NAME	DRAWING REFERENCE	0	1	2	3	4 [6	7	8	9 1	0 1	LATEST REVISION NOTE
					9			7			<u> </u>	EMESTALVISION NOTE
uctural Engineers	BETTS_EG_SHAF_DM	Α	Α	Α	-+		_		 		_	
uctural Calculations	BETTSCALCS_EG_SHAF_DM	-	-	-			4—	-	1			
on	BISON_EG_SHAF_DM		-	-								
tnic	CATNIC_EG_SHAF_DM	-	-	Α								Lintel specification updated
naldson	DTE_EG_SHAF_DM	Α	Α	Α								
virovent	ENVIRO_EG_SHAF_DM	-		-								
lite	JABLITE_EG_SHAF_DM	-	-	-								
nes Jones	JJI_EG_SHAF_DM		-	Α								Trimmers repositioned
/stone	KEYSTONE_EG_SHAF_DM	-	-	Α								Lintel specification updated
ores	MOORES_EG_SHAF_DM	-	-	-			1	1		\neg		· · · ·
son	MYSON EG SHAF DM	Α	В	С					1 1			Myson IZT zones added and towelrad outputs updated
nphony	SYM EG SHAF DM	-	-	-			+	1	 		-	,
	5.101_E0_511/41_DIVI	- -			-+	-	+	+	+ +	\dashv	+	
						-				-+	+	
					-+				++		+	
	DITAGE		~	~								
		~	7	7	1							
HF	RIIAUT	\sim	_									
HE	RITAGE	3b 23	,04/	/10/								W REDROW
HE	- REDROW -	Feb 23	19/04/23	02/10/23								ॐ REDROW

| FW | SQ M: | 132.16 m²

Shaftesbury

G SERIES

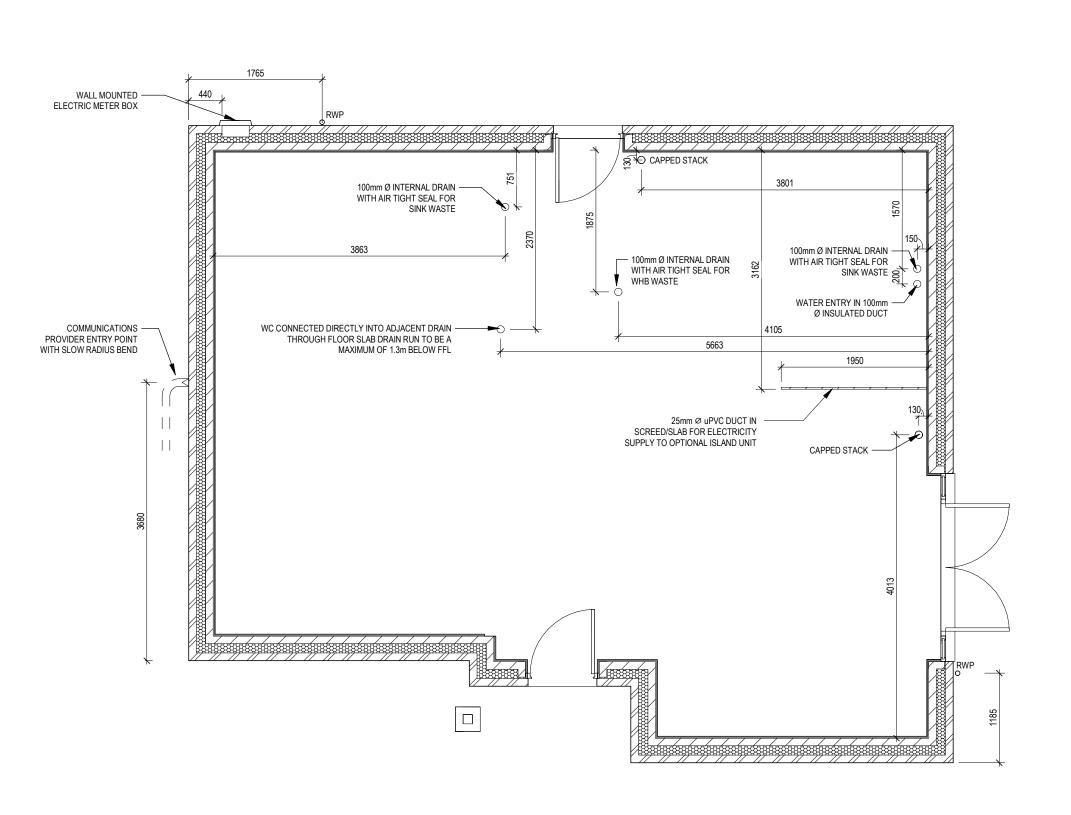

Shaftesbury

ॐ REDROW

Slab Penetration Layout

82

Dwg No 160 Dwg Rev

	Window Schedule								
Ref	Frame Width	Frame Height	Int Block Opening	Comments	P1A - Glazing	PAS 24 - Locking			
W01	2510	1490	2520			Yes			
W02	1835	1490	1845			Yes			
W03	1273	1490	1283			Yes			
W04	1273	1490	1283			Yes			
W05	1835	1190	1845			Yes			
W06	1835	1340	1845	ESC					
W07	1273	1040	1283						
W08	1835	1340	1845	ESC					
W09	1273	1340	1283						
W10	1273	1340	1283	ESC					
W11	710	1040	720	OBS					
W12	1273	1190	1283	ESC					
W13	710	1040	720	OBS					


Door Schedule - Internal								
Ref	Width	Height	Fire Rating	Code				
D04	745	1400		ID13				
D05	900	2150		HID2				
D06	900	2150		HID2				
D07	900	2150		HID2				
D08	900	2150		HID2				
D09	825	2150		HID3				
D10	825	2150		HID3				
D11	825	2150		HID3				
D12	825	2150		HID3				
D13	825	2150		HID3				
D14	825	2150		HID3				
D15	825	2150		HID3				

Door Schedule - External										
Ref	Frame Width	Int Block Opening	Height	Model	P1A - Glazing	PAS 24 - Locking				
D01	935	975	2250	HED03	Yes	Yes				
D02	935	975	2250	HRD01	Yes	Yes				
D03	2475	2485	2250	HRD16	Yes	Yes				

WALL LEGEND

WALL LLGLIND				
WALL TYPE	SIZE (mm)	STRENGTH (N/mm²)	DENSITY (Kg/m³)	LAMBDA (A)
BLOCKWORK ZZZZ	100	3.6	600	0.15
BLOCKWORK 7////////////////////////////////////	100	3.6	MIN 1350	-
40dB STUDWORK (EXERCISES SEE SEE SEE SEE SEE SEE SEE SEE SEE	63 (88)	-	-	-




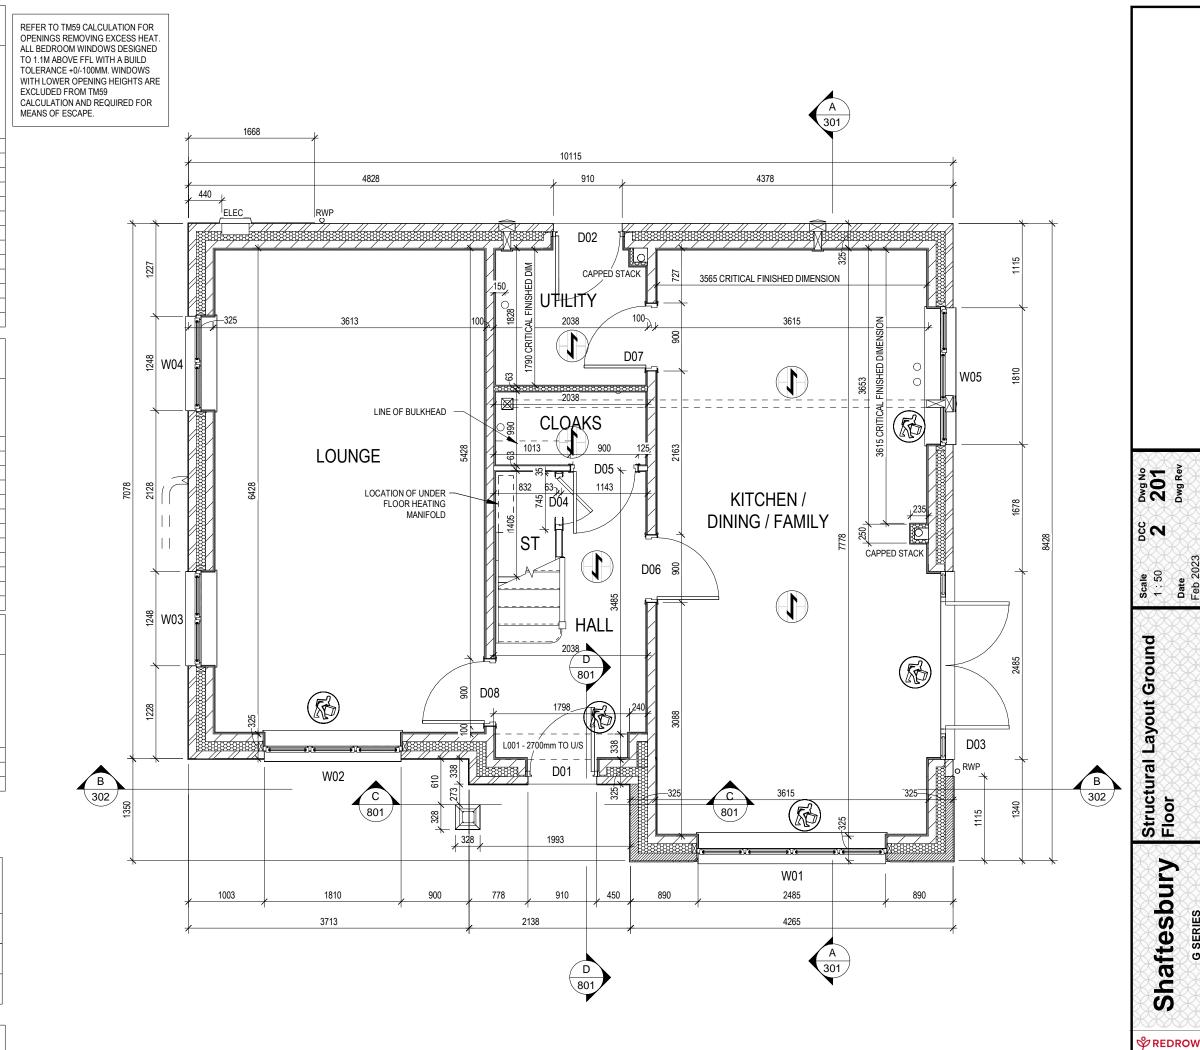

to copyright law. Do Not Scale Off This Drawing

	Window Schedule									
Ref	Frame Width	Frame Height	Int Block Opening	Comments	P1A - Glazing	PAS 24 - Locking				
W01	2510	1490	2520			Yes				
W02	1835	1490	1845			Yes				
W03	1273	1490	1283			Yes				
W04	1273	1490	1283			Yes				
W05	1835	1190	1845			Yes				
W06	1835	1340	1845	ESC						
W07	1273	1040	1283							
W08	1835	1340	1845	ESC						
W09	1273	1340	1283							
W10	1273	1340	1283	ESC						
W11	710	1040	720	OBS						
W12	1273	1190	1283	ESC						
W13	710	1040	720	OBS						

Door Schedule - Internal								
Ref	Width	Height	Fire Rating	Code				
D04	745	1400		ID13				
D05	900	2150		HID2				
D06	900	2150		HID2				
D07	900	2150		HID2				
D08	900	2150		HID2				
D09	825	2150		HID3				
D10	825	2150		HID3				
D11	825	2150		HID3				
D12	825	2150		HID3				
D13	825	2150		HID3				
D14	825	2150		HID3				
D15	825	2150		HID3				



1003

1810

1340

5850

1248

450


D 801 1213

FOR CAVITY TRAY SETTING

OUT SEE DWG 801



WALL LEGEND									
WALL TYPE	SIZE (mm)	STRENGTH (N/mm²)	DENSITY (Kg/m³)	LAMBDA					
BLOCKWORK Z	100	3.6	600	0.15					
BLOCKWORK 7////////////////////////////////////	100	3.6	MIN 1350	-					
40dB STUDWORK व्यवस्थानसम्बद्ध	63 (88)	-	-	-					

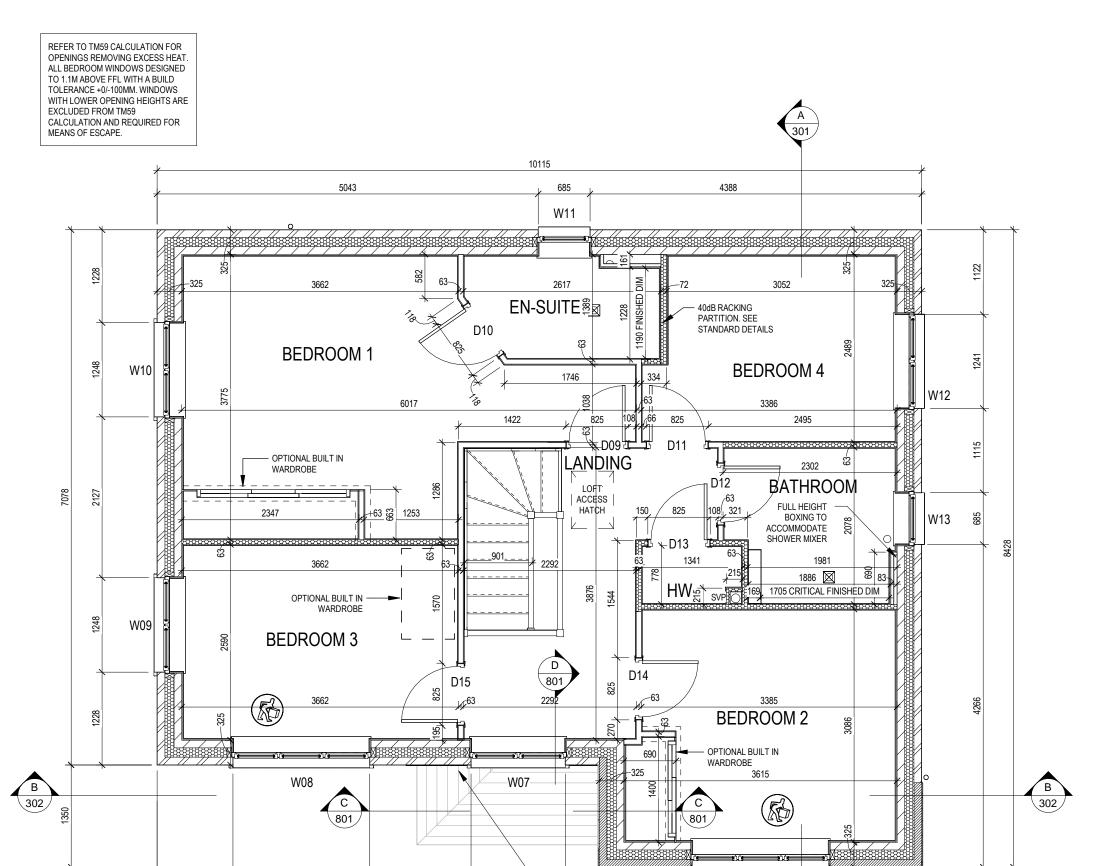

W06

1840

4265

A 301 1213

Do Not Scale 202 202 Dwg Rev ga Scale 1:50 Structural Layout First Floor Shaftesbury $\operatorname{\hspace{.1em}\rlap{.}\raisebox{.4ex}{$\scriptstyle\circ$}}$ REDROW

Off This

	Window Schedule									
Ref	Frame Width	Frame Height	Int Block Opening	Comments	P1A - Glazing	PAS 24 - Locking				
W01	2510	1490	2520			Yes				
W02	1835	1490	1845			Yes				
W03	1273	1490	1283			Yes				
W04	1273	1490	1283			Yes				
W05	1835	1190	1845			Yes				
W06	1835	1340	1845	ESC						
W07	1273	1040	1283							
W08	1835	1340	1845	ESC						
W09	1273	1340	1283							
W10	1273	1340	1283	ESC						
W11	710	1040	720	OBS						
W12	1273	1190	1283	ESC						
W13	710	1040	720	OBS						


	Door Schedule - Internal								
Ref	Width	Height	Fire Rating	Code					
D04	745	1400		ID13					
D05	900	2150		HID2					
D06	900	2150		HID2					
D07	900	2150		HID2					
D08	900	2150		HID2					
D09	825	2150		HID3					
D10	825	2150		HID3					
D11	825	2150		HID3					
D12	825	2150		HID3					
D13	825	2150		HID3					
D14	825	2150		HID3					
D15	825	2150		HID3					

Ref	Frame Width	Int Block Opening	Height	Model	P1A - Glazing	PAS 24 - Locking
D01	935	975	2250	HED03	Yes	Yes
D02	935	975	2250	HRD01	Yes	Yes
D03	2475	2485	2250	HRD16	Yes	Yes

WALL LEGEND

WALL LEGEND				
WALL TYPE	SIZE (mm)	STRENGTH (N/mm²)	DENSITY (Kg/m³)	LAMBDA (A)
BLOCKWORK Z	100	3.6	600	0.15
BLOCKWORK SXXXXX	100	7.3	750	0.19
BLOCKWORK 7////////////////////////////////////	100	3.6	MIN 1350	-
40dB STUDWORK	63 (88)	-	-	-

REFER TO TM59 CALCULATION FOR OPENINGS REMOVING EXCESS HEAT. ALL BEDROOM WINDOWS DESIGNED TO 1.1M ABOVE FFL WITH A BUILD TOLERANCE +0/-100MM. WINDOWS WITH LOWER OPENING HEIGHTS ARE EXCLUDED FROM TM59 CALCULATION AND REQUIRED FOR MEANS OF ESCAPE.

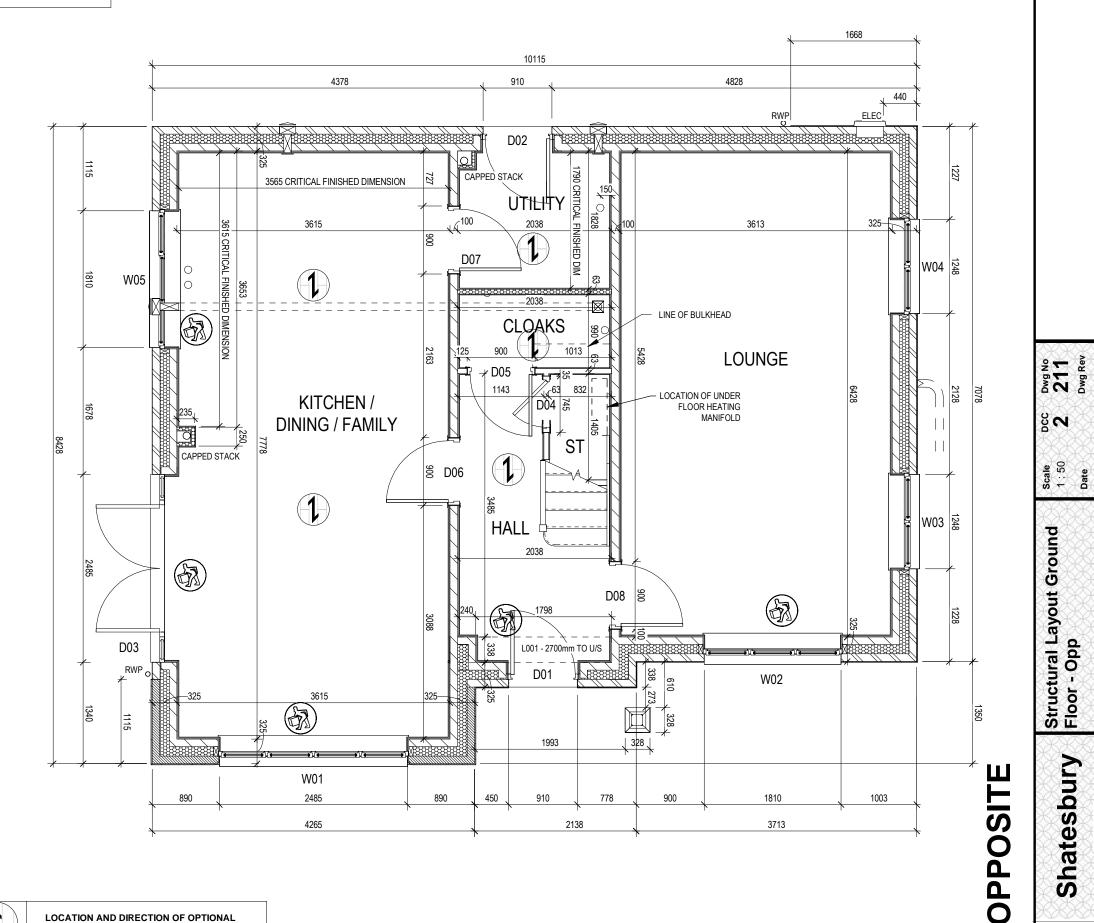



LOCATION AND DIRECTION OF OPTIONAL FLOOR TILING

Shatesbury

Date Feb 2

to copyright law. Do Not Scale Off This Drawing


		Window Schedule						
Ref	Frame Width	Frame Height	Int Block Opening	Comments	P1A - Glazing	PAS 24 - Locking		
W01	2510	1490	2520			Yes		
W02	1835	1490	1845			Yes		
W03	1273	1490	1283			Yes		
W04	1273	1490	1283			Yes		
W05	1835	1190	1845			Yes		
W06	1835	1340	1845	ESC				
W07	1273	1040	1283					
W08	1835	1340	1845	ESC				
W09	1273	1340	1283					
W10	1273	1340	1283	ESC				
W11	710	1040	720	OBS				
W12	1273	1190	1283	ESC				
W13	710	1040	720	OBS				

Door Schedule - Internal								
Ref	Width	Height	Fire Rating	Code				
D04	745	1400		ID13				
D05	900	2150		HID2				
D06	900	2150		HID2				
D07	900	2150		HID2				
D08	900	2150		HID2				
D09	825	2150		HID3				
D10	825	2150		HID3				
D11	825	2150		HID3				
D12	825	2150		HID3				
D13	825	2150		HID3				
D14	825	2150		HID3				
D15	825	2150		HID3				

WALL LEGEN


WALL LEGEND								
	WALL TYPE	SIZE (mm)	STRENGTH (N/mm²)	DENSITY (Kg/m³)	LAMBDA (A)			
	BLOCKWORK	100	3.6	600	0.15			
	BLOCKWORK SXXXXX	100	7.3	750	0.19			
	BLOCKWORK 7////////////////////////////////////	100	3.6	MIN 1350	-			
	40dB STUDWORK क् टाउडिट उटाउडिट	63 (88)	-	-	-			


REFER TO TM59 CALCULATION FOR OPENINGS REMOVING EXCESS HEAT. ALL BEDROOM WINDOWS DESIGNED TO 1.1M ABOVE FFL WITH A BUILD TOLERANCE +0/-100MM. WINDOWS WITH LOWER OPENING HEIGHTS ARE EXCLUDED FROM TM59 CALCULATION AND REQUIRED FOR MEANS OF ESCAPE.

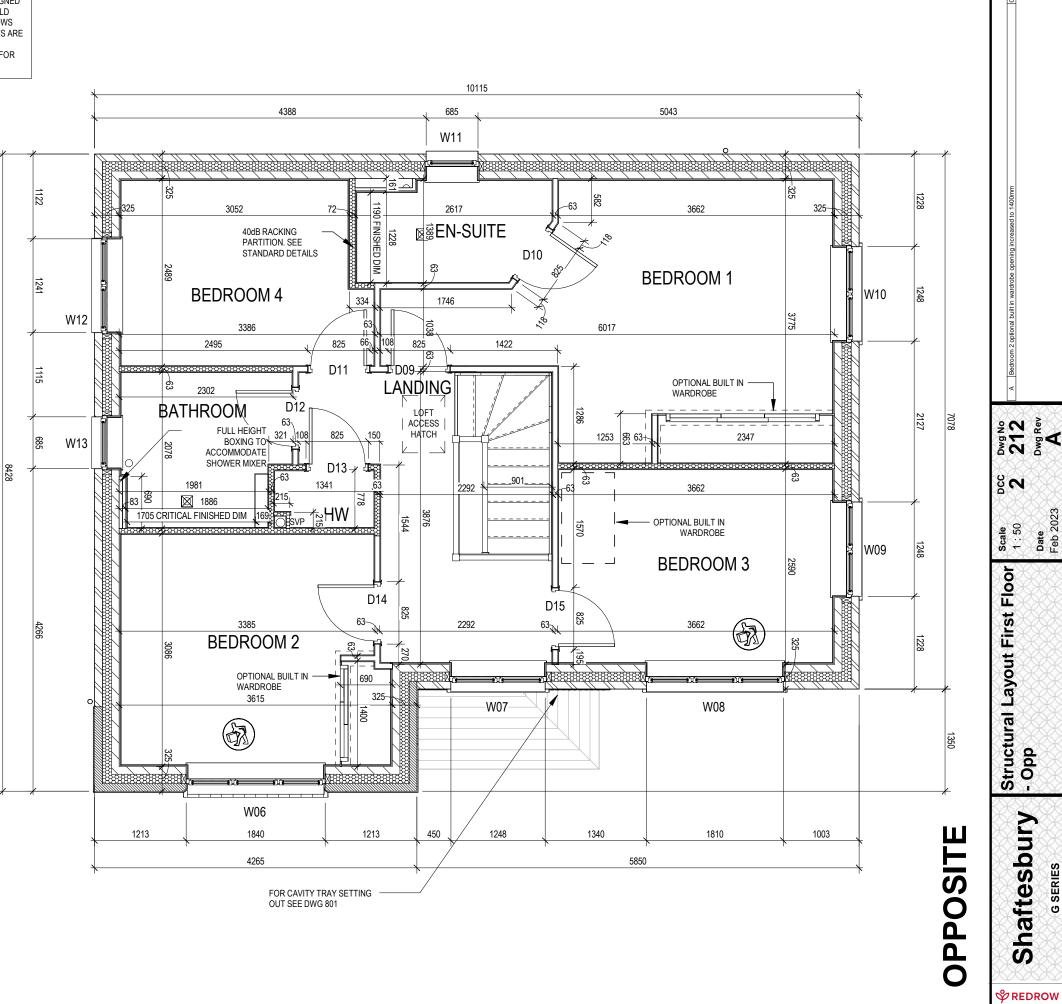

Off This

. Do Not Scale (

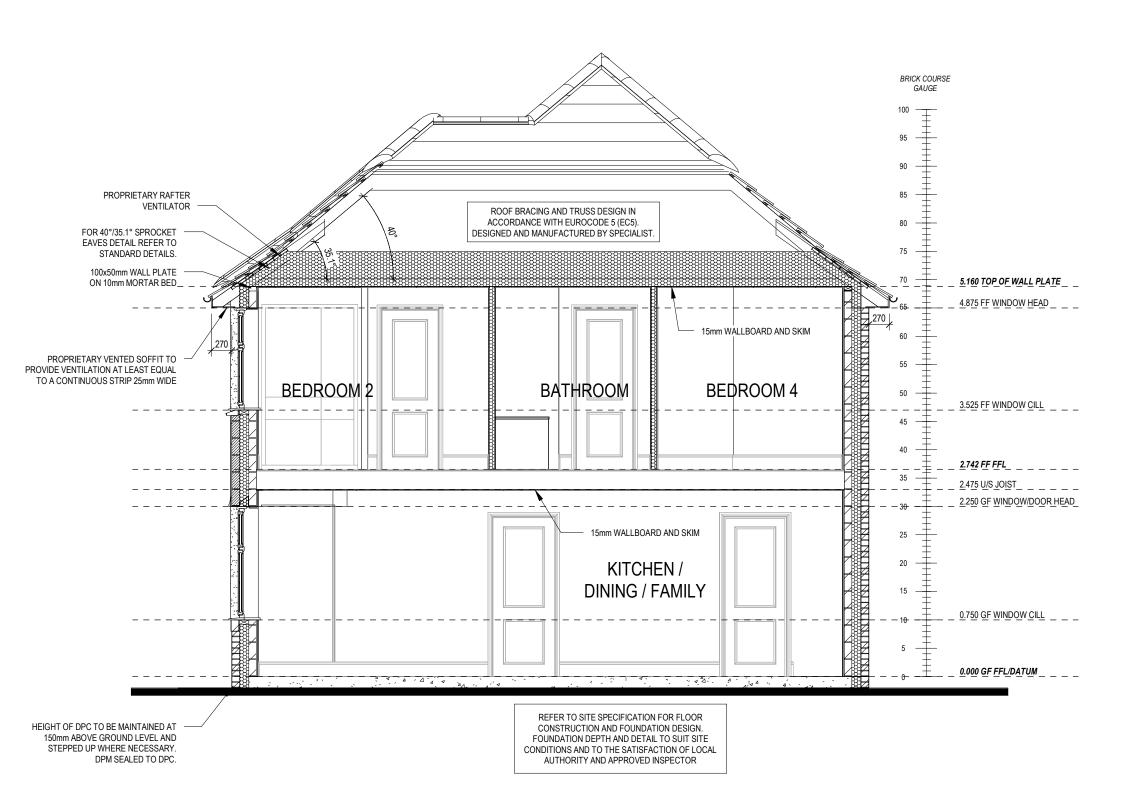



REFER TO TM59 CALCULATION FOR OPENINGS REMOVING EXCESS HEAT. ALL BEDROOM WINDOWS DESIGNED TO 1.1M ABOVE FFL WITH A BUILD TOLERANCE +0/-100MM. WINDOWS WITH LOWER OPENING HEIGHTS ARE EXCLUDED FROM TM59 CALCULATION AND REQUIRED FOR MEANS OF ESCAPE.

PART 'O' COMPLIANCE DIAGRAM Scale: 1:50

Shaftesbury

Section A-A


301 Dwg Rev

82

Off This

. Do Not Scale (

REFER TO SITE SPECIFICATION FOR FLOOR CONSTRUCTION AND FOUNDATION DESIGN. FOUNDATION DEPTH AND DETAIL TO SUIT SITE CONDITIONS AND TO THE SATISFACTION OF LOCAL AUTHORITY AND APPROVED INSPECTOR

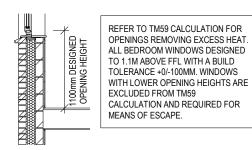

PART 'O' COMPLIANCE DIAGRAM Scale: 1:50

Shaftesbury Section B-

302 302 Dwg Rev


Scale 1:50 Date Feb 200


82

Off This

. Do Not Scale (

REFER TO TM59 CALCULATION FOR OPENINGS REMOVING EXCESS HEAT. ALL BEDROOM WINDOWS DESIGNED TO 1.1M ABOVE FFL WITH A BUILD TOLERANCE +0/-100MM. WINDOWS WITH LOWER OPENING HEIGHTS ARE EXCLUDED FROM TM59 CALCULATION AND REQUIRED FOR MEANS OF ESCAPE.

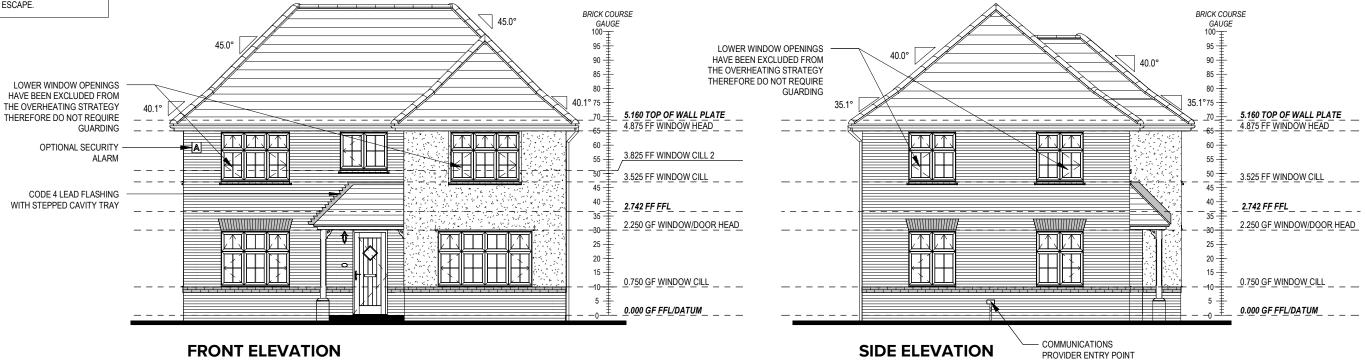

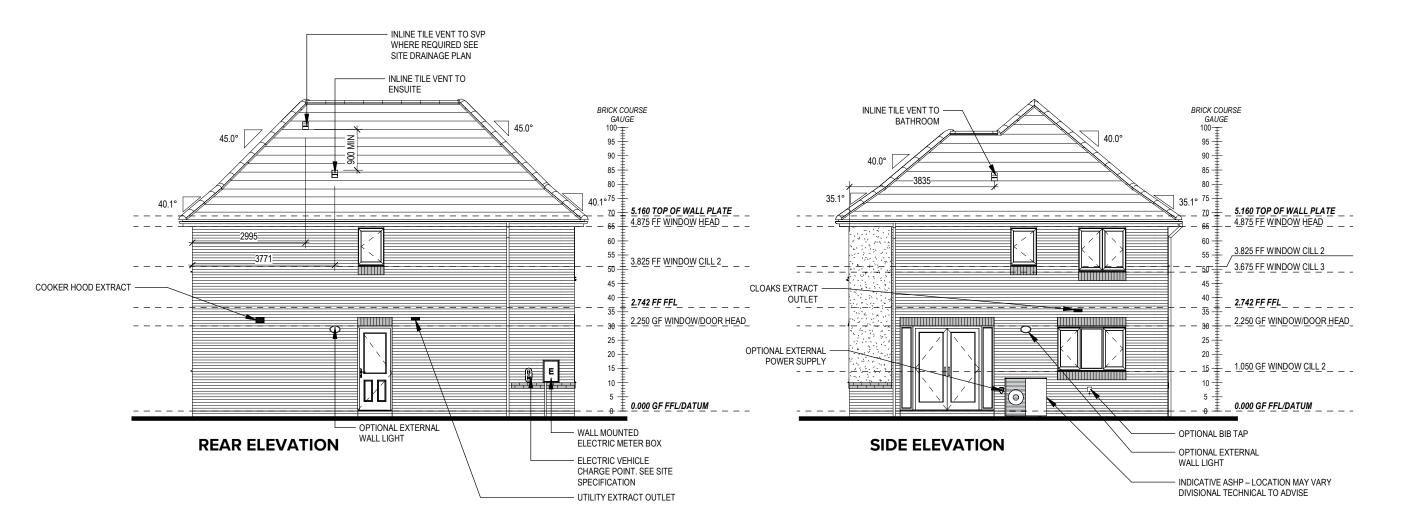


Off This Do Not 401 Dwg Rev


Date Feb 2023

Elevations

SO

Shaftesbury

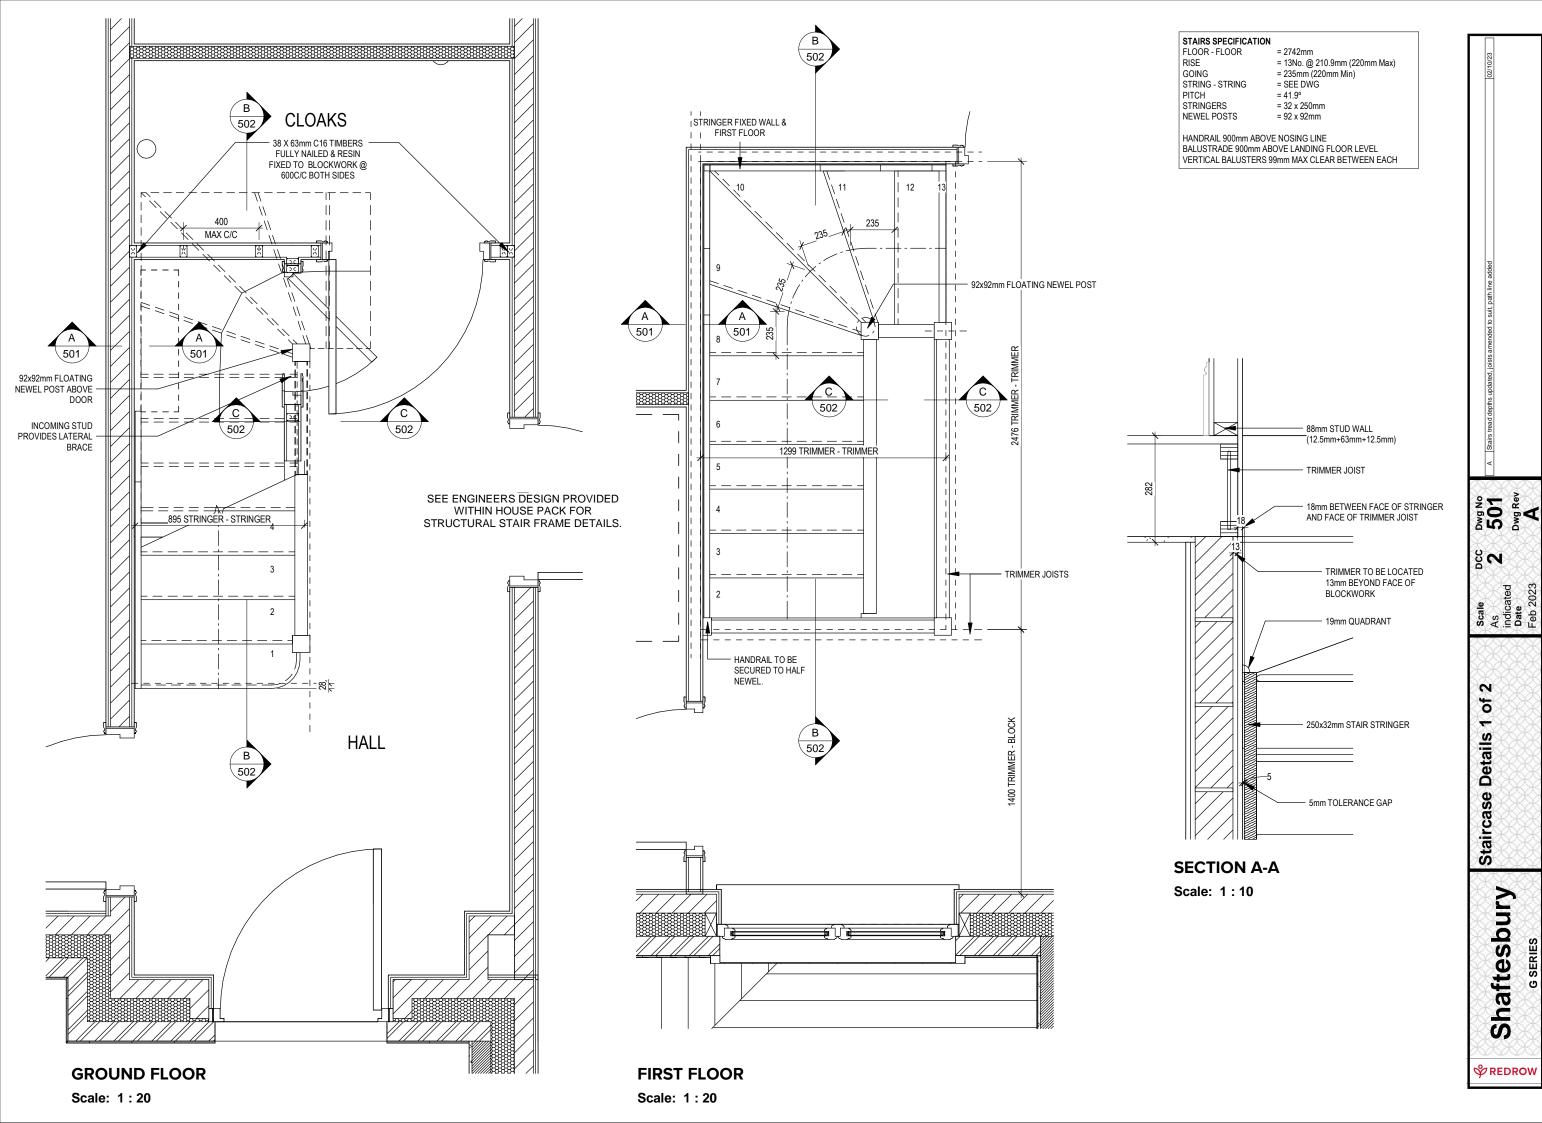

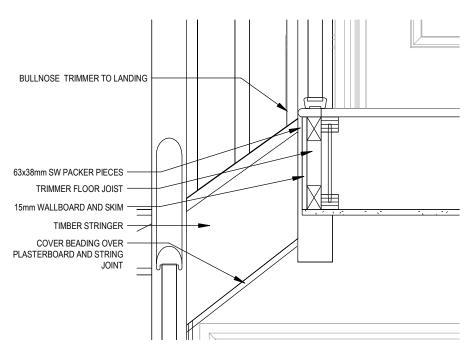

SECTION C-C

Scale: 1:10

Shaftesbury G SERIES


502 502 Dwg Rev

2 of

Staircase details

Do Not Scale

⇔ REDROW

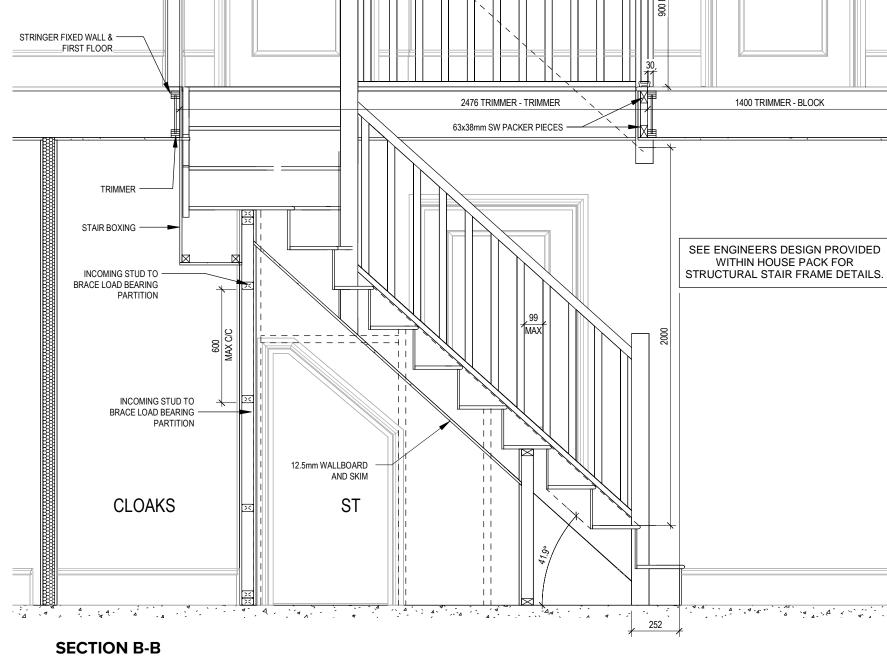

LANDING

Scale: 1:20

ELECTRICAL LEGEND PENDANT TYPE LIGHT FITTING BATTEN HOLDER LIGHT FITTING SINGLE S/W SOCKET OUTLET (LOW LEVEL) DOUBLE S/W SOCKET OUTLET (FILLED AT LOW LEVEL, CLEAR AT HIGH USB 📑 DOUBLE S/W SOCKET OUTLET WITH DOUBLE USB SOCKET (FILLED AT LOW LEVEL, CLEAR AT HIGH LEVEL) USB 3 EV = ELECTRIC VEHICLE CHARGE POINT (SEE SITE SPECIFICATION) EXT **-**¶ EXTERNAL POWER SUPPLY (OPTIONAL) $-\Box$ FUSED OUTLET (IMMERSION) ISOLATOR SWITCH SINGLE SWITCH, DOUBLE SWITCH, TRIPLE SWITCH NOTE: WHERE MULTIPLE SWITCHES ARE INDICATED TOGETHER THESE ARE TO BE SWITCHED ON ONE SINGLE PLATE NOT ON 299 COMBINED T.V., SATELLITE AND DATA POINT WITH OPTIONAL HIGH LEVEL MOUNT T.V. POINT WITH OPTIONAL DATA POINT AND OPTIONAL HIGH LEVEL OPTIONAL T.V. POINT WITH OPTIONAL DATA POINT AND OPTIONAL DATA POINT \odot SMOKE DETECTOR \oplus HEAT DETECTOR SHAVER SOCKET ROOM THERMOSTAT S -□ IZT -□ INDIVIDUAL ZONE THERMOSTAT PROGRAMMER AND HOT WATER TIMER РЯ PROGRAMMABLE THERMOSTAT R Tq EXTERNAL WALL LIGHT FITTING WITH INTEGRAL DUSK TO DAWN SENSOR EXTERNAL SURFACE MOUNTED BULKHEAD LIGHT FITTING TO 0 DOOR BELL PUSH BUTTON IN FRAME PV METER SWITCH (SITE UPGRADE/CUSTOMER OPTION) SEMI RECESSED CONSUMER UNIT DUSK TO DAWN SENSOR \triangleleft COMMS ENTRY POINT WITH SLOW RADIUS BEND COMBINATION WALL MOUNTED ELECTRICAL DEVICES (REFER TO STD DETAIL) CONSISTING:

- ALARM KEYPAD (CUSTOMER OPTION)

DOOR CONTACT (CUSTOMER OPTION)


JUNCTION BOX (IF REQUIRED)

PASSIVE INFRA-RED DETECTOR TO BE FITTED 2.4m MAX ABOVE FFL

- TRIPLE LIGHT SWITCH
BANK OF SWITCHES

(CUSTOMER OPTION)

(DC)

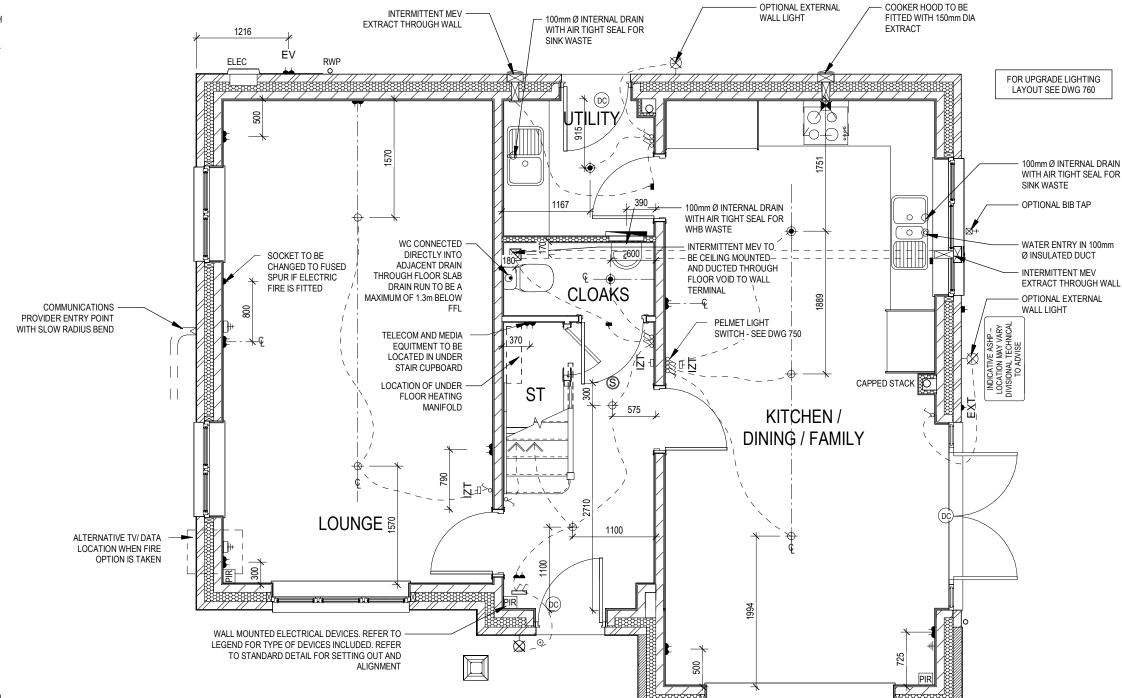



601 bwg Rey

SO

50 e

Ground

Layout

Date Feb 2 ₽

മ

ELECTRICAL LEGEND PENDANT TYPE LIGHT FITTING BATTEN HOLDER LIGHT FITTING SINGLE S/W SOCKET OUTLET (LOW LEVEL) DOUBLE S/W SOCKET OUTLET (FILLED AT LOW LEVEL, CLEAR AT HIGH USB □ DOUBLE S/W SOCKET OUTLET WITH DOUBLE USB SOCKET (FILLED AT LOW LEVEL, CLEAR AT HIGH LEVEL) USB ₹ ELECTRIC VEHICLE CHARGE POINT (SEE SITE SPECIFICATION) EXT -**€** EXTERNAL POWER SUPPLY (OPTIONAL) -FUSED OUTLET (IMMERSION) -ISOLATOR SWITCH SINGLE SWITCH, DOUBLE SWITCH, TRIPLE SWITCH 88 NOTE: WHERE MULTIPLE SWITCHES ARE INDICATED TOGETHER THESE ARE TO BE SWITCHED ON ONE SINGLE PLATE NOT ON 999 MULTIPLE PLATES. COMBINED T.V., SATELLITE AND DATA POINT WITH OPTIONAL HIGH LEVEL MOUNT T.V. POINT WITH OPTIONAL DATA POINT AND OPTIONAL HIGH LEVEL OPTIONAL T.V. POINT WITH OPTIONAL DATA POINT AND OPTIONAL HIGH LEVEL MOUNT DATA POINT \Box \odot SMOKE DETECTOR \oplus HEAT DETECTOR SHAVER SOCKET s -(ROOM THERMOSTAT s -⊓ IZT -□ INDIVIDUAL ZONE THERMOSTAT PROGRAMMER AND HOT WATER TIMER Р∜П PT ∜ PROGRAMMABLE THERMOSTAT EXTERNAL WALL LIGHT FITTING WITH INTEGRAL DUSK TO DAWN \boxtimes EXTERNAL SURFACE MOUNTED BULKHEAD LIGHT FITTING TO 0 DOOR BELL PUSH BUTTON IN FRAME

PV METER SWITCH (SITE UPGRADE/CUSTOMER OPTION)

SEMI RECESSED CONSUMER UNIT

COMMS ENTRY POINT WITH SLOW RADIUS BEND

COMBINATION WALL MOUNTED ELECTRICAL DEVICES (REFER TO STD DETAIL), CONSISTING:

- DOOR BELL CHIME - ALARM KEYPAD (CUSTOMER OPTION)

BANK OF SWITCHES

DUSK TO DAWN SENSOR

 \triangleleft


(DC)

- TRIPLE LIGHT SWITCH

PASSIVE INFRA-RED DETECTOR TO BE FITTED 2.4m MAX ABOVE FFL (CUSTOMER OPTION)

DOOR CONTACT (CUSTOMER OPTION)

JUNCTION BOX (IF REQUIRED)

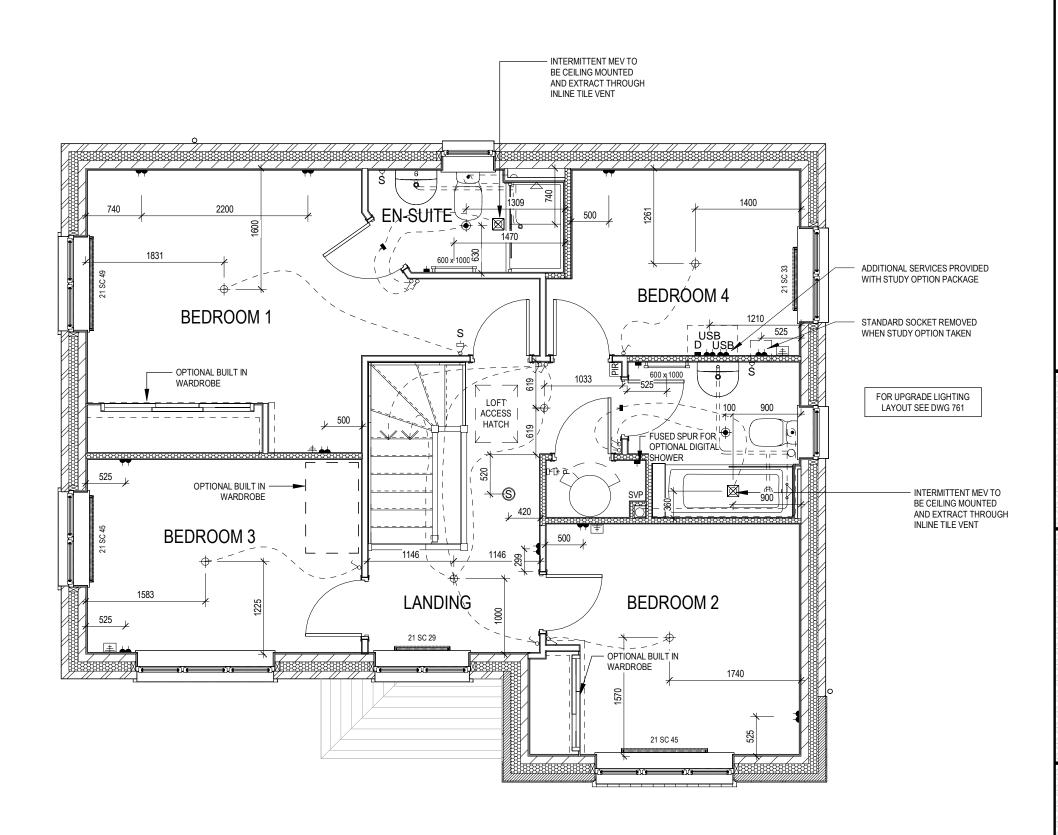

₽ Š 8

602 bwg Rev

Scale 1:50

Floo

First

Layout

Services


Shaftesbury

ॐ REDROW

Date Feb 2

(DC)

DOOR CONTACT (CUSTOMER OPTION)

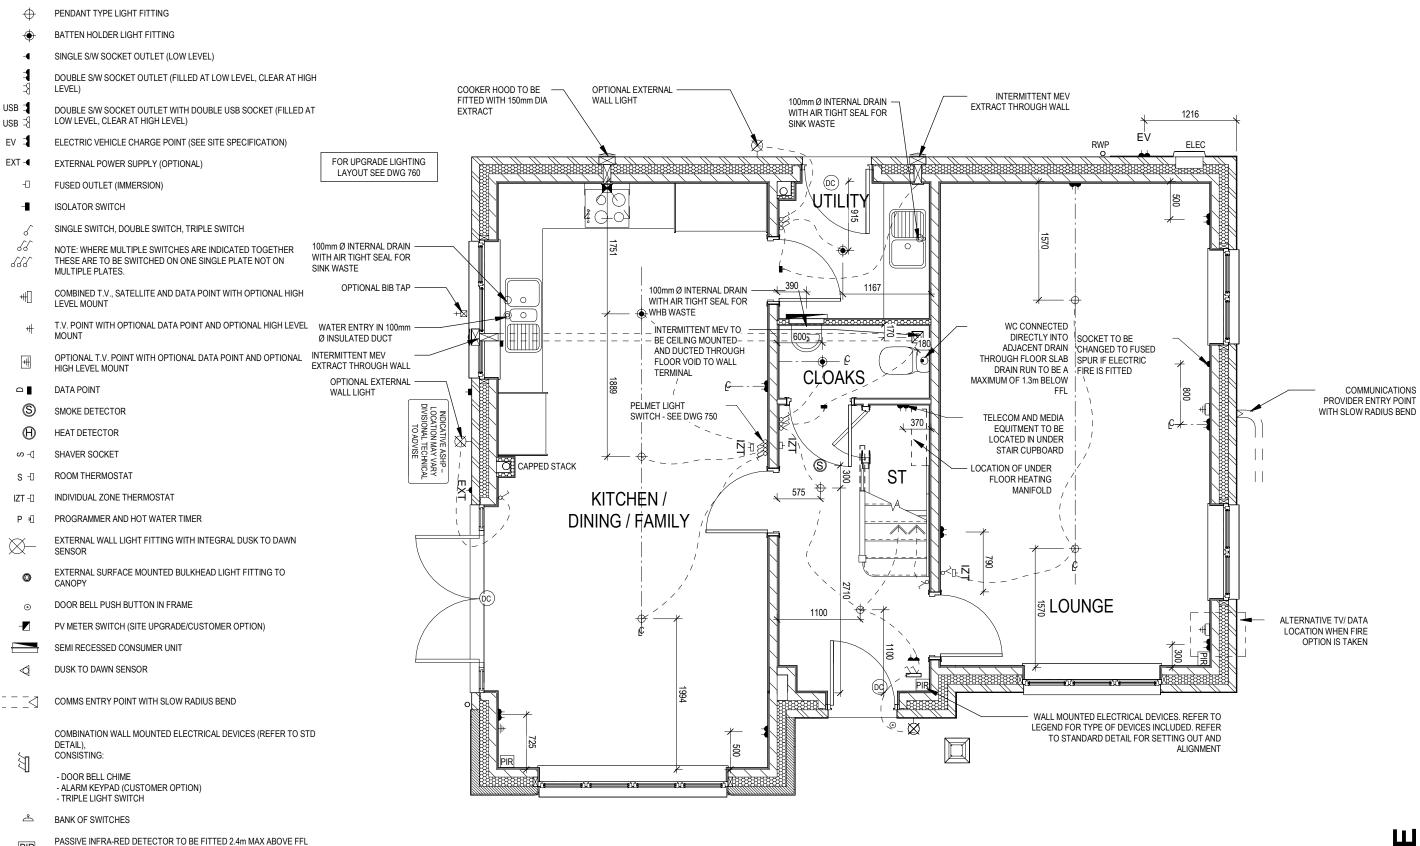

OPPOSITE

Shaftesbury Floor - Opp

G SERIES

This drawing must be read in conjunction with relevant Redrow specifications standard


611 611 Dwg Rev

SO

Ground

മ

- PENDANT TYPE LIGHT FITTING
- ◆ BATTEN HOLDER LIGHT FITTING◆ SINGLE S/W SOCKET OUTLET (LOW LEVEL)
- DOUBLE S/W SOCKET OUTLET (FILLED AT LOW LEVEL, CLEAR AT HIGH
- USB \$\frac{1}{2}\$ DOUBLE SW SOCKET OUTLET WITH DOUBLE USB SOCKET (FILLED AT USB \$\frac{1}{2}\$\$ LOW LEVEL, CLEAR AT HIGH LEVEL)
- EV 🔳 ELECTRIC VEHICLE CHARGE POINT (SEE SITE SPECIFICATION)
- EXT ■ EXTERNAL POWER SUPPLY (OPTIONAL)
 - ☐ FUSED OUTLET (IMMERSION)
 - ISOLATOR SWITCH
- SINGLE SWITCH, DOUBLE SWITCH, TRIPLE SWITCH
- NOTE: WHERE MULTIPLE SWITCHES ARE INDICATED TOGETHER
 THESE ARE TO BE SWITCHED ON ONE SINGLE PLATE NOT ON
 MULTIPLE PLATES.
- COMBINED T.V., SATELLITE AND DATA POINT WITH OPTIONAL HIGH LEVEL MOUNT
- OPTIONAL T.V. POINT WITH OPTIONAL DATA POINT AND OPTIONAL HIGH LEVEL MOUNT
- □ DATA POINT
- S SMOKE DETECTOR
- HEAT DETECTOR
- ∽ SHAVER SOCKET
- S ROOM THERMOSTAT
- IZT INDIVIDUAL ZONE THERMOSTAT
- P ★□ PROGRAMMER AND HOT WATER TIMER
- EXTERNAL WALL LIGHT FITTING WITH INTEGRAL DUSK TO DAWN
- EXTERNAL SURFACE MOUNTED BULKHEAD LIGHT FITTING TO
- $_{\odot}$ DOOR BELL PUSH BUTTON IN FRAME
- PV METER SWITCH (SITE UPGRADE/CUSTOMER OPTION)
- SEMI RECESSED CONSUMER UNIT
- DUSK TO DAWN SENSOR
- COMMS ENTRY POINT WITH SLOW RADIUS BEND
 - COMBINATION WALL MOUNTED ELECTRICAL DEVICES (REFER TO STD DETAIL),
 CONSISTING:
 - DOOR BELL CHIME
 - ALARM KEYPAD (CUSTOMER OPTION)
 - TRIPLE LIGHT SWITCH
- A BANK OF SWITCHES
- PIR PASSIVE INFRA-RED DETECTOR TO BE FITTED 2.4m MAX ABOVE FFL (CUSTOMER OPTION)
- DOOR CONTACT (CUSTOMER OPTION)

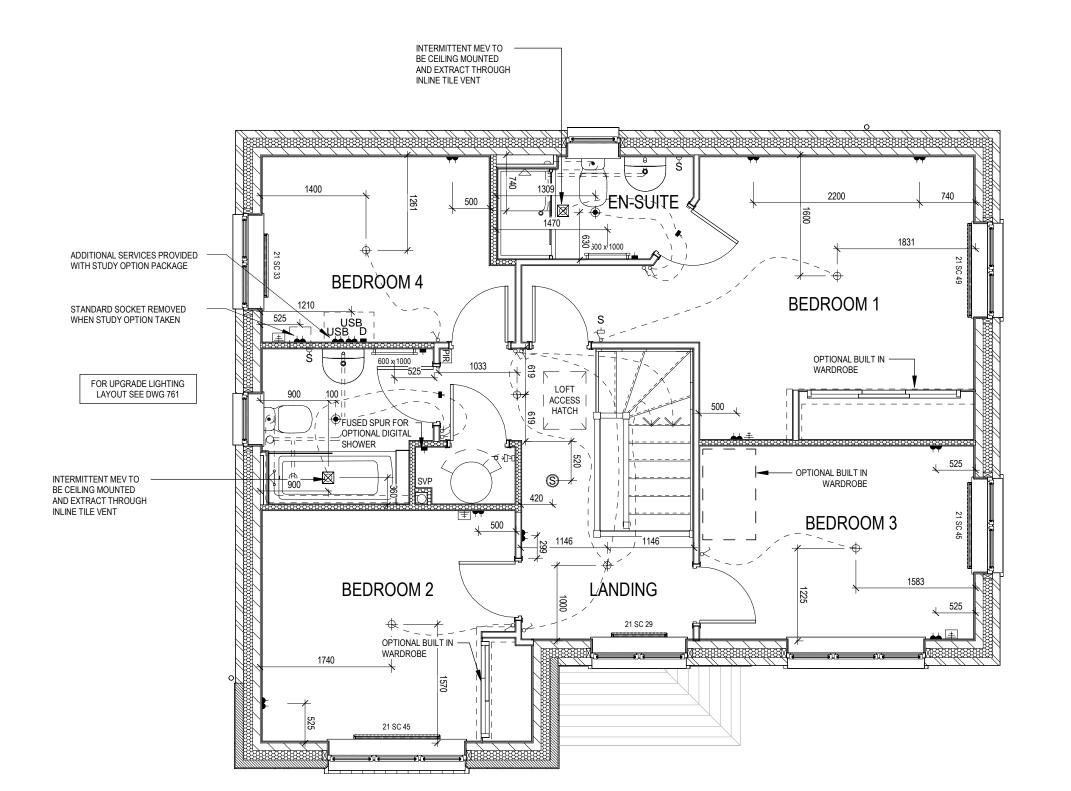

OPPOSITE

Shaftesbury Opp

G SERIES

This description and in conjunction with robust Bodom good and details a

61, 61, Dwg R

SO

50 e

Floo

₽


Do Not

- □ FUSED OUTLET (IMMERSION)
- UFH OPTIONAL ELECTRIC UNDER FLOOR HEATING WITH
- CONTROLLER AND STAT
- SINGLE SWITCH
- DOUBLE SWITCH
- TRIPLE SWITCH

 NOTE: WHERE MULTIPLE SWITCHES ARE INDICATED TOGETHER THESE ARE TO BE SWITCHED ON ONE


SINGLE PLATE NOT ON MULTIPLE PLATES.

- Di OPTIONAL DIGITAL SHOWER SWITCH
- IZT INDIVIDUAL ZONE THERMOSTAT
- J JUNCTION BOX (IF REQUIRED)

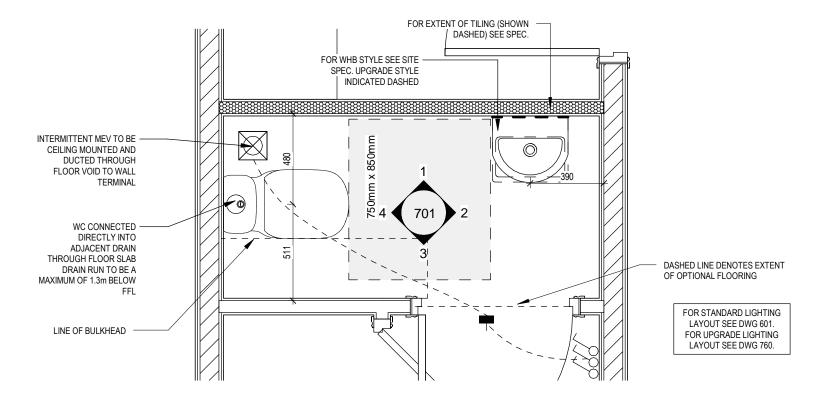

CLOAKS LAYOUT


Scale: 1:20

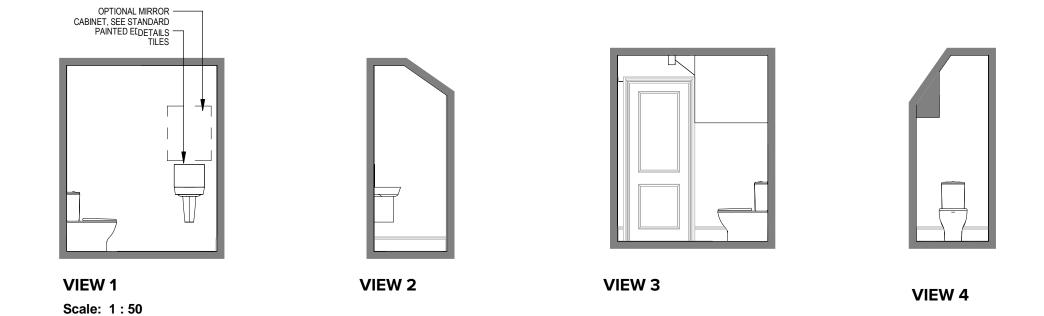


Off This . Do Not Scale (

Shaftesbury

Cloaks Details

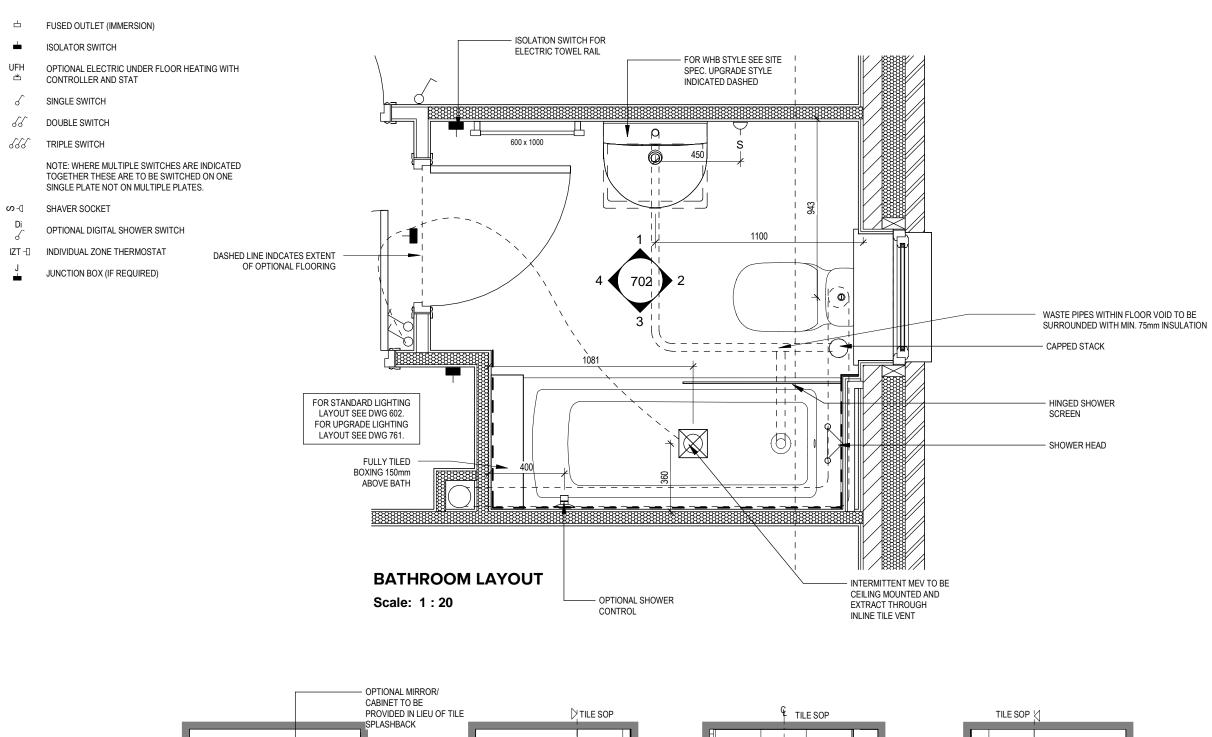

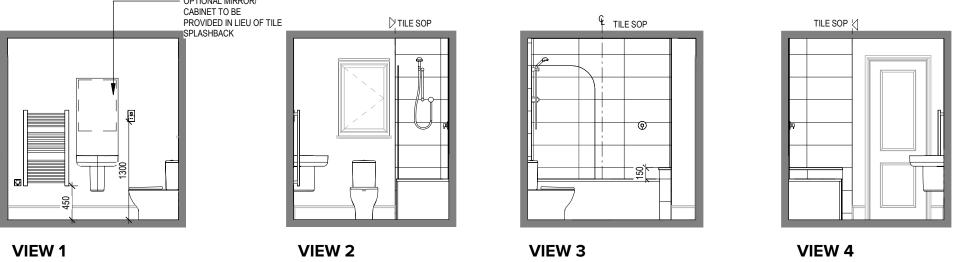

Scale: 1:50

Bathroom Details

Shaftesbury

 $\mathop{ hinspace}
olimits$ redrow

Off This

ISOLATOR SWITCH

OPTIONAL ELECTRIC UNDER FLOOR HEATING WITH CONTROLLER AND STAT

SINGLE SWITCH

88 DOUBLE SWITCH

999 TRIPLE SWITCH


> NOTE: WHERE MULTIPLE SWITCHES ARE INDICATED TOGETHER THESE ARE TO BE SWITCHED ON ONE SINGLE PLATE NOT ON MULTIPLE PLATES.


S SHAVER SOCKET

OPTIONAL DIGITAL SHOWER SWITCH


IZT -□ INDIVIDUAL ZONE THERMOSTAT


JUNCTION BOX (IF REQUIRED)

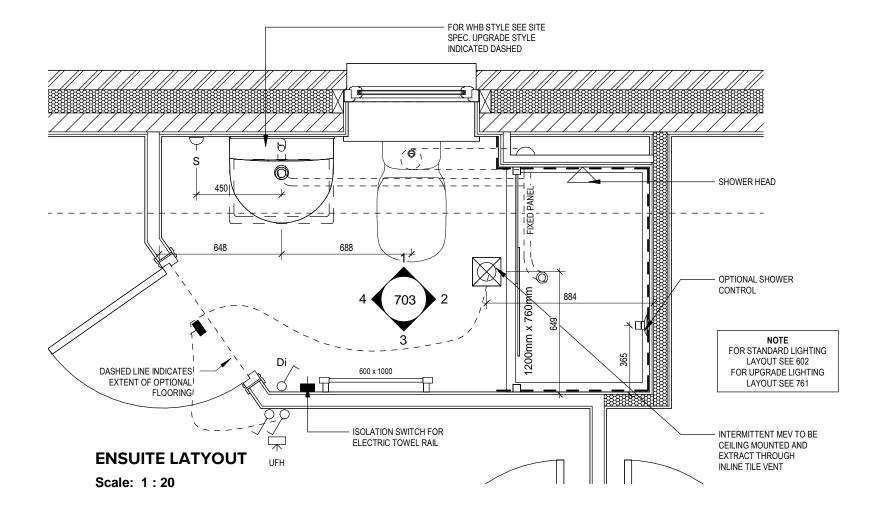

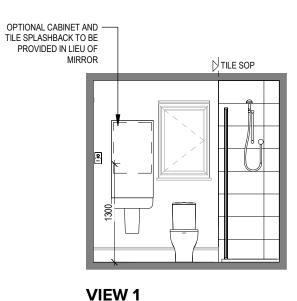

Scale: 1:50

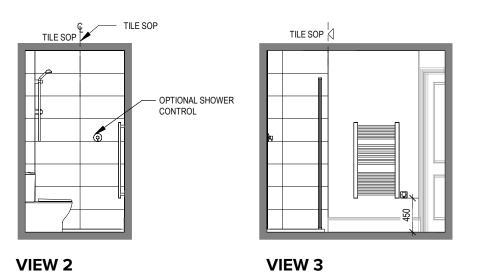




VIEW 4


Off This

Do Not Scale

Shaftesbury

 $\mathop{ hinspace}
olimits$ redrow

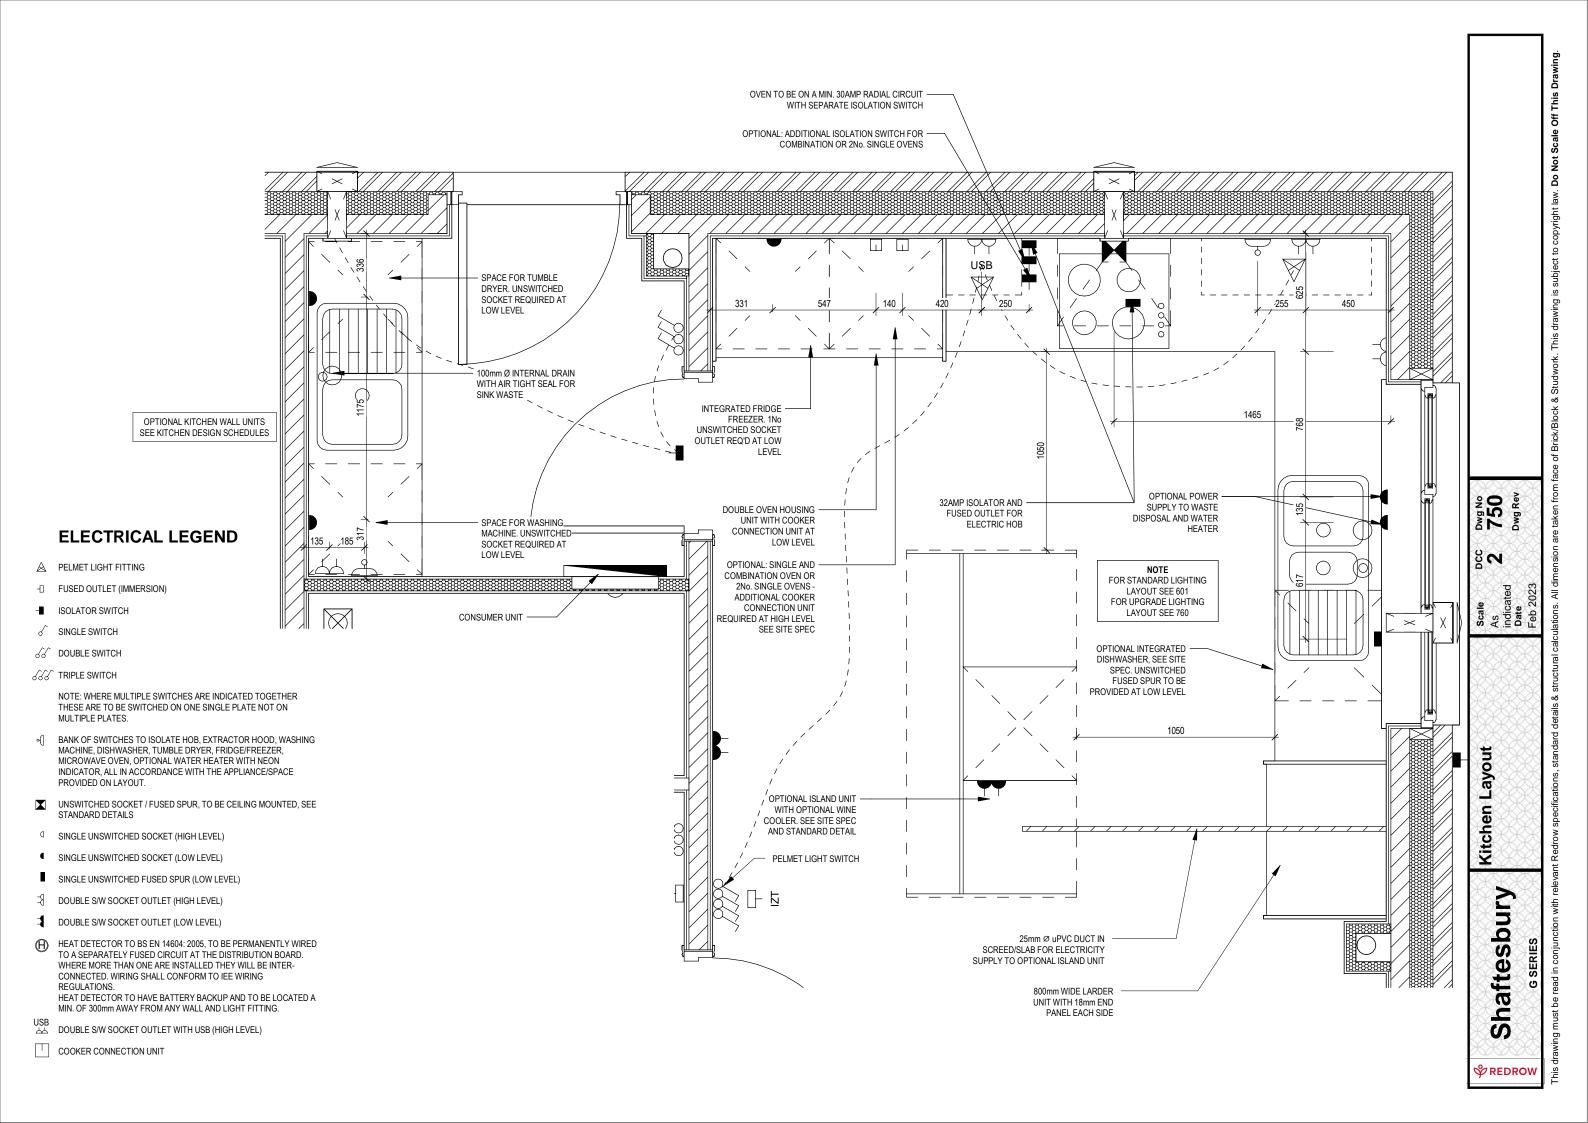

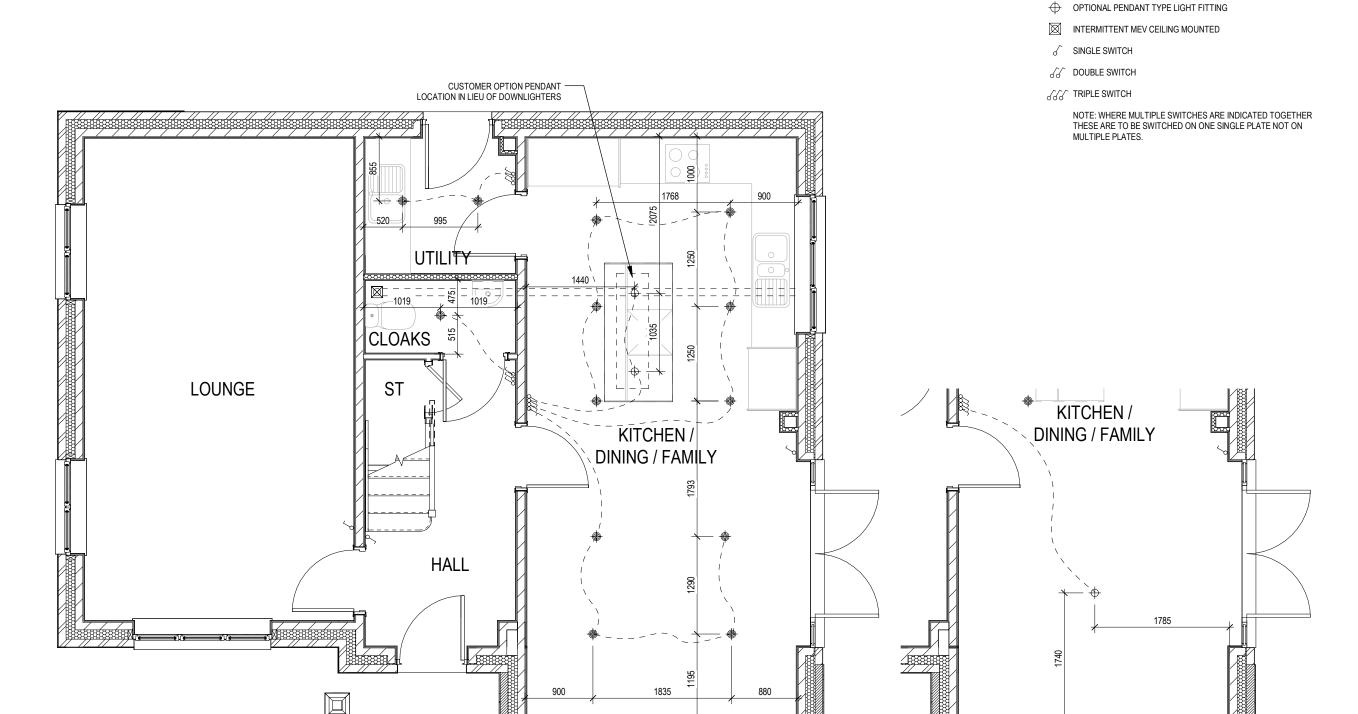

UPGRADE / CUSTOMER OPTION LIGHTING LAYOUT

SHOWHOME LIGHTING LAYOUT

ELECTRICAL LEGEND

OPTIONAL LOW VOLTAGE DOWNLIGHTER FITTING

OPTIONAL LOW VOLTAGE DOWNLIGHTER FITTING

→ OPTIONAL PENDANT TYPE LIGHT FITTING

SINGLE SWITCH

S DOUBLE SWITCH

/// TRIPLE SWITCH

NOTE: WHERE MULTIPLE SWITCHES ARE INDICATED TOGETHER THESE ARE TO BE SWITCHED ON ONE SINGLE PLATE NOT ON MULTIPLE PLATES.

Optional Lighting Layout


1:50
First Floor
Date

Dwg No 761 Dwg Rev

200

subject to copyright law. Do Not Scale Off This Drawing.

Shaftesbury

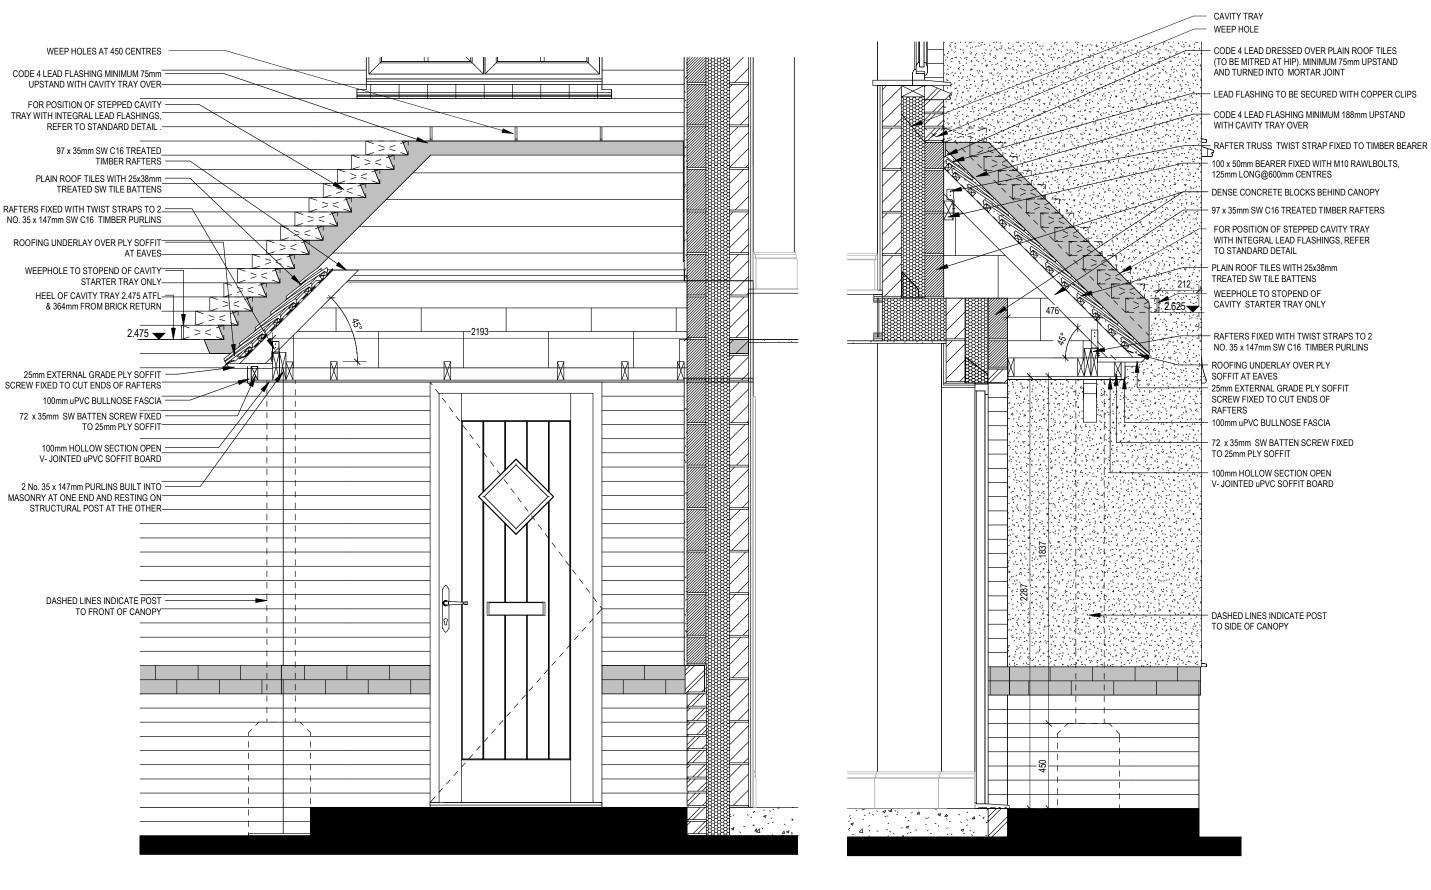

SECTION C-C SECTION D-D

Š 8 801 Boug Rev S/N Canopy Details Shaftesbury $\mathop{ hinspace}
olimits$ redrow

ð#