


[illegible]

1. Nominal cover to reinforcement to be :-
Top cover = 50mm (formwork shutter)
Side cover = 50mm (formwork shutter)
Bottom cover = 50mm (formwork shutter)
2. Reinforcement to be high yield steel to BS 8666:2005.
3. UNPROTECTED REINFORCEMENT, CARE TO BE TAKEN TO AVOID THE RISK OF FALLING ONTO AND BEING INJURED BY REINFORCEMENT.
4. For details of reinforcement refer to bar bending schedules :-
SA00394-4634-S-BLOCK-BBS Sheets 1-4.
5. Target lap lengths:
H10 - 400mm - allowable; not less than 380mm
H12 - 500mm - allowable; not less than 456mm
H16 - 650mm - allowable; not less than 608mm
H20 - 800mm - allowable; not less than 760mm
H25 - 1000mm - allowable; not less than 950mm
6. Abbreviations
T1 - Top layer of reinforcement
T2 - Second from top layer of reinforcement
B1 - Bottom layer of reinforcement
B2 - Second from bottom layer of reinforcement.



BLOCK D
PLOTS - 56 - 74
GROUND BEAM RC LAYOUT SHEET 2

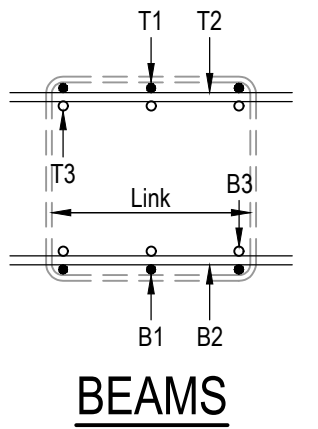