




1. Nominal cover to reinforcement to be :-
Top cover = 50mm (formwork shutter)
Side cover = 50mm (formwork shutter)
Bottom cover = 50mm (formwork shutter)
2. Reinforcement to be high yield steel to BS 8666:2005.
3. UNPROTECTED REINFORCEMENT CARE TO BE TAKEN TO AVOID THE RISK OF FALLING ONTO AND BEING INJURED BY REINFORCEMENT.
4. For details of reinforcement refer to bar bending schedules :-
SA00394-4618-S-BLOCK-BBS Sheet 1-4.
5. Target lap lengths:
H10 - 400mm - allowable; not less than 380mm
H12 - 500mm - allowable; not less than 456mm
H16 - 650mm - allowable; not less than 608mm
H20 - 800mm - allowable; not less than 760mm
H25 - 1000mm - allowable; not less than 950mm

T1 - Top layer of reinforcement
T2 - Second from top layer of reinforcement
B1 - Bottom layer of reinforcement
B2 - Second from bottom layer of reinforcement



CALA HOMES (THAMES) LIMITED

BLOCK C PLOTS - 34 - 55 GROUND
BEAM RC LAYOUT

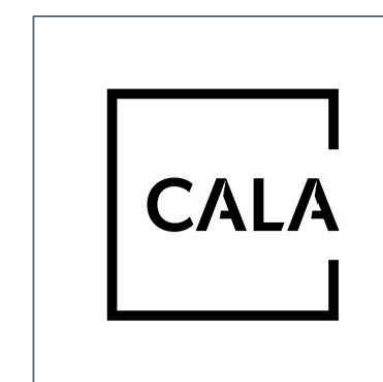

St Andrew's House
23 Kingfield Road
Sheffield, S11 9AS

T: 0114 255 4555
E: mail@eastwoodce.com
eastwoodce.com

48174	1:50	CONSTRUCTION E
-------	------	----------------

Project
SA00394-4617-S-BLOCKC-RC

