

NOTE: THIS DRAWING IS TO BE READ IN CONJUNCTION WITH THE DANDARA TECHNICAL SPECIFICATION & ARCHITECTURAL STANDARD DETAILS

SUBSTRUCTURE LEGEND

- TV Telescopic vents @ 1500mm c/c maximum
- AB Air bricks @ 1500mm c/c maximum
- 7.3N/mm² concrete blocks with GEN 3 infill OR 7.3N/mm² aerated trench blocks [300w x 440l x 215h].
- Threshold floor finish to continue into doorway

SERVICES/ PIPEWORK

- Incoming Electric Service Duct
- Incoming Water Supply
- Incoming Telecom Service Duct
- Incoming High Speed Data Duct
- FS - Floor Socket
- SVP - Soil Vent Pipe
- SS - Stub Stack Pipe
- W - Incoming Water Supply

SUBSTRUCTURE NOTES

1) Telescopic vents and air bricks are shown indicative only. They are to be placed @ 1500mm c/c maximum however not directly under floor beam bearings and positioned not more than 450mm from the ends of the wall, minimum 225mm away from door openings and at least 180mm clear of a gas meter box.

In accordance with Approved Document C, Building Regulations the ventilation openings provided should be not less than either 1.500mm²/m run of external wall or 500mm²/m² of floor area, whichever give the greater opening area.

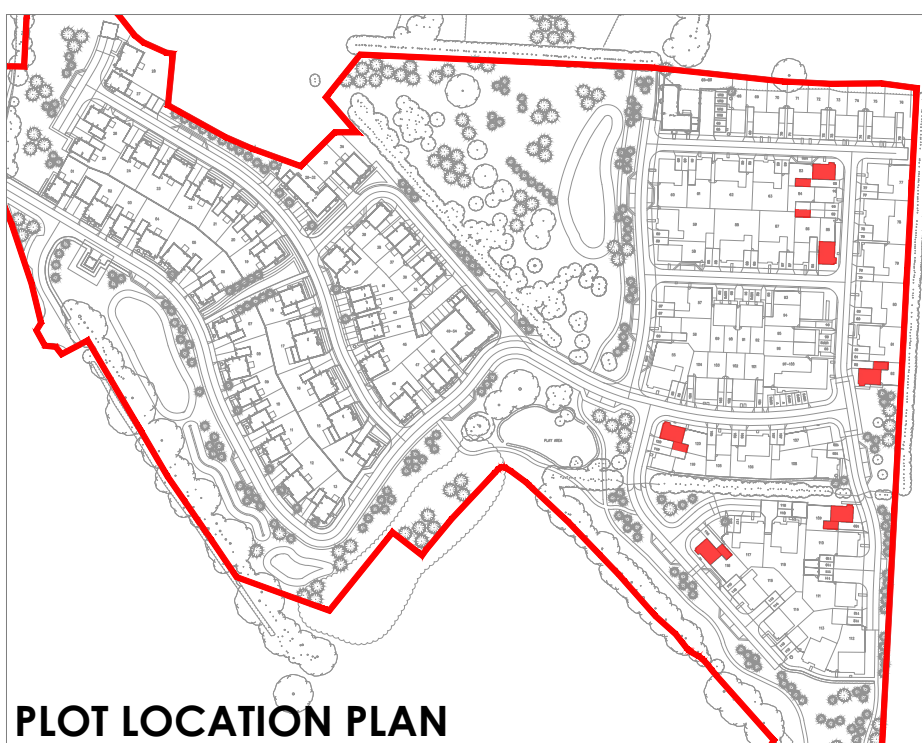
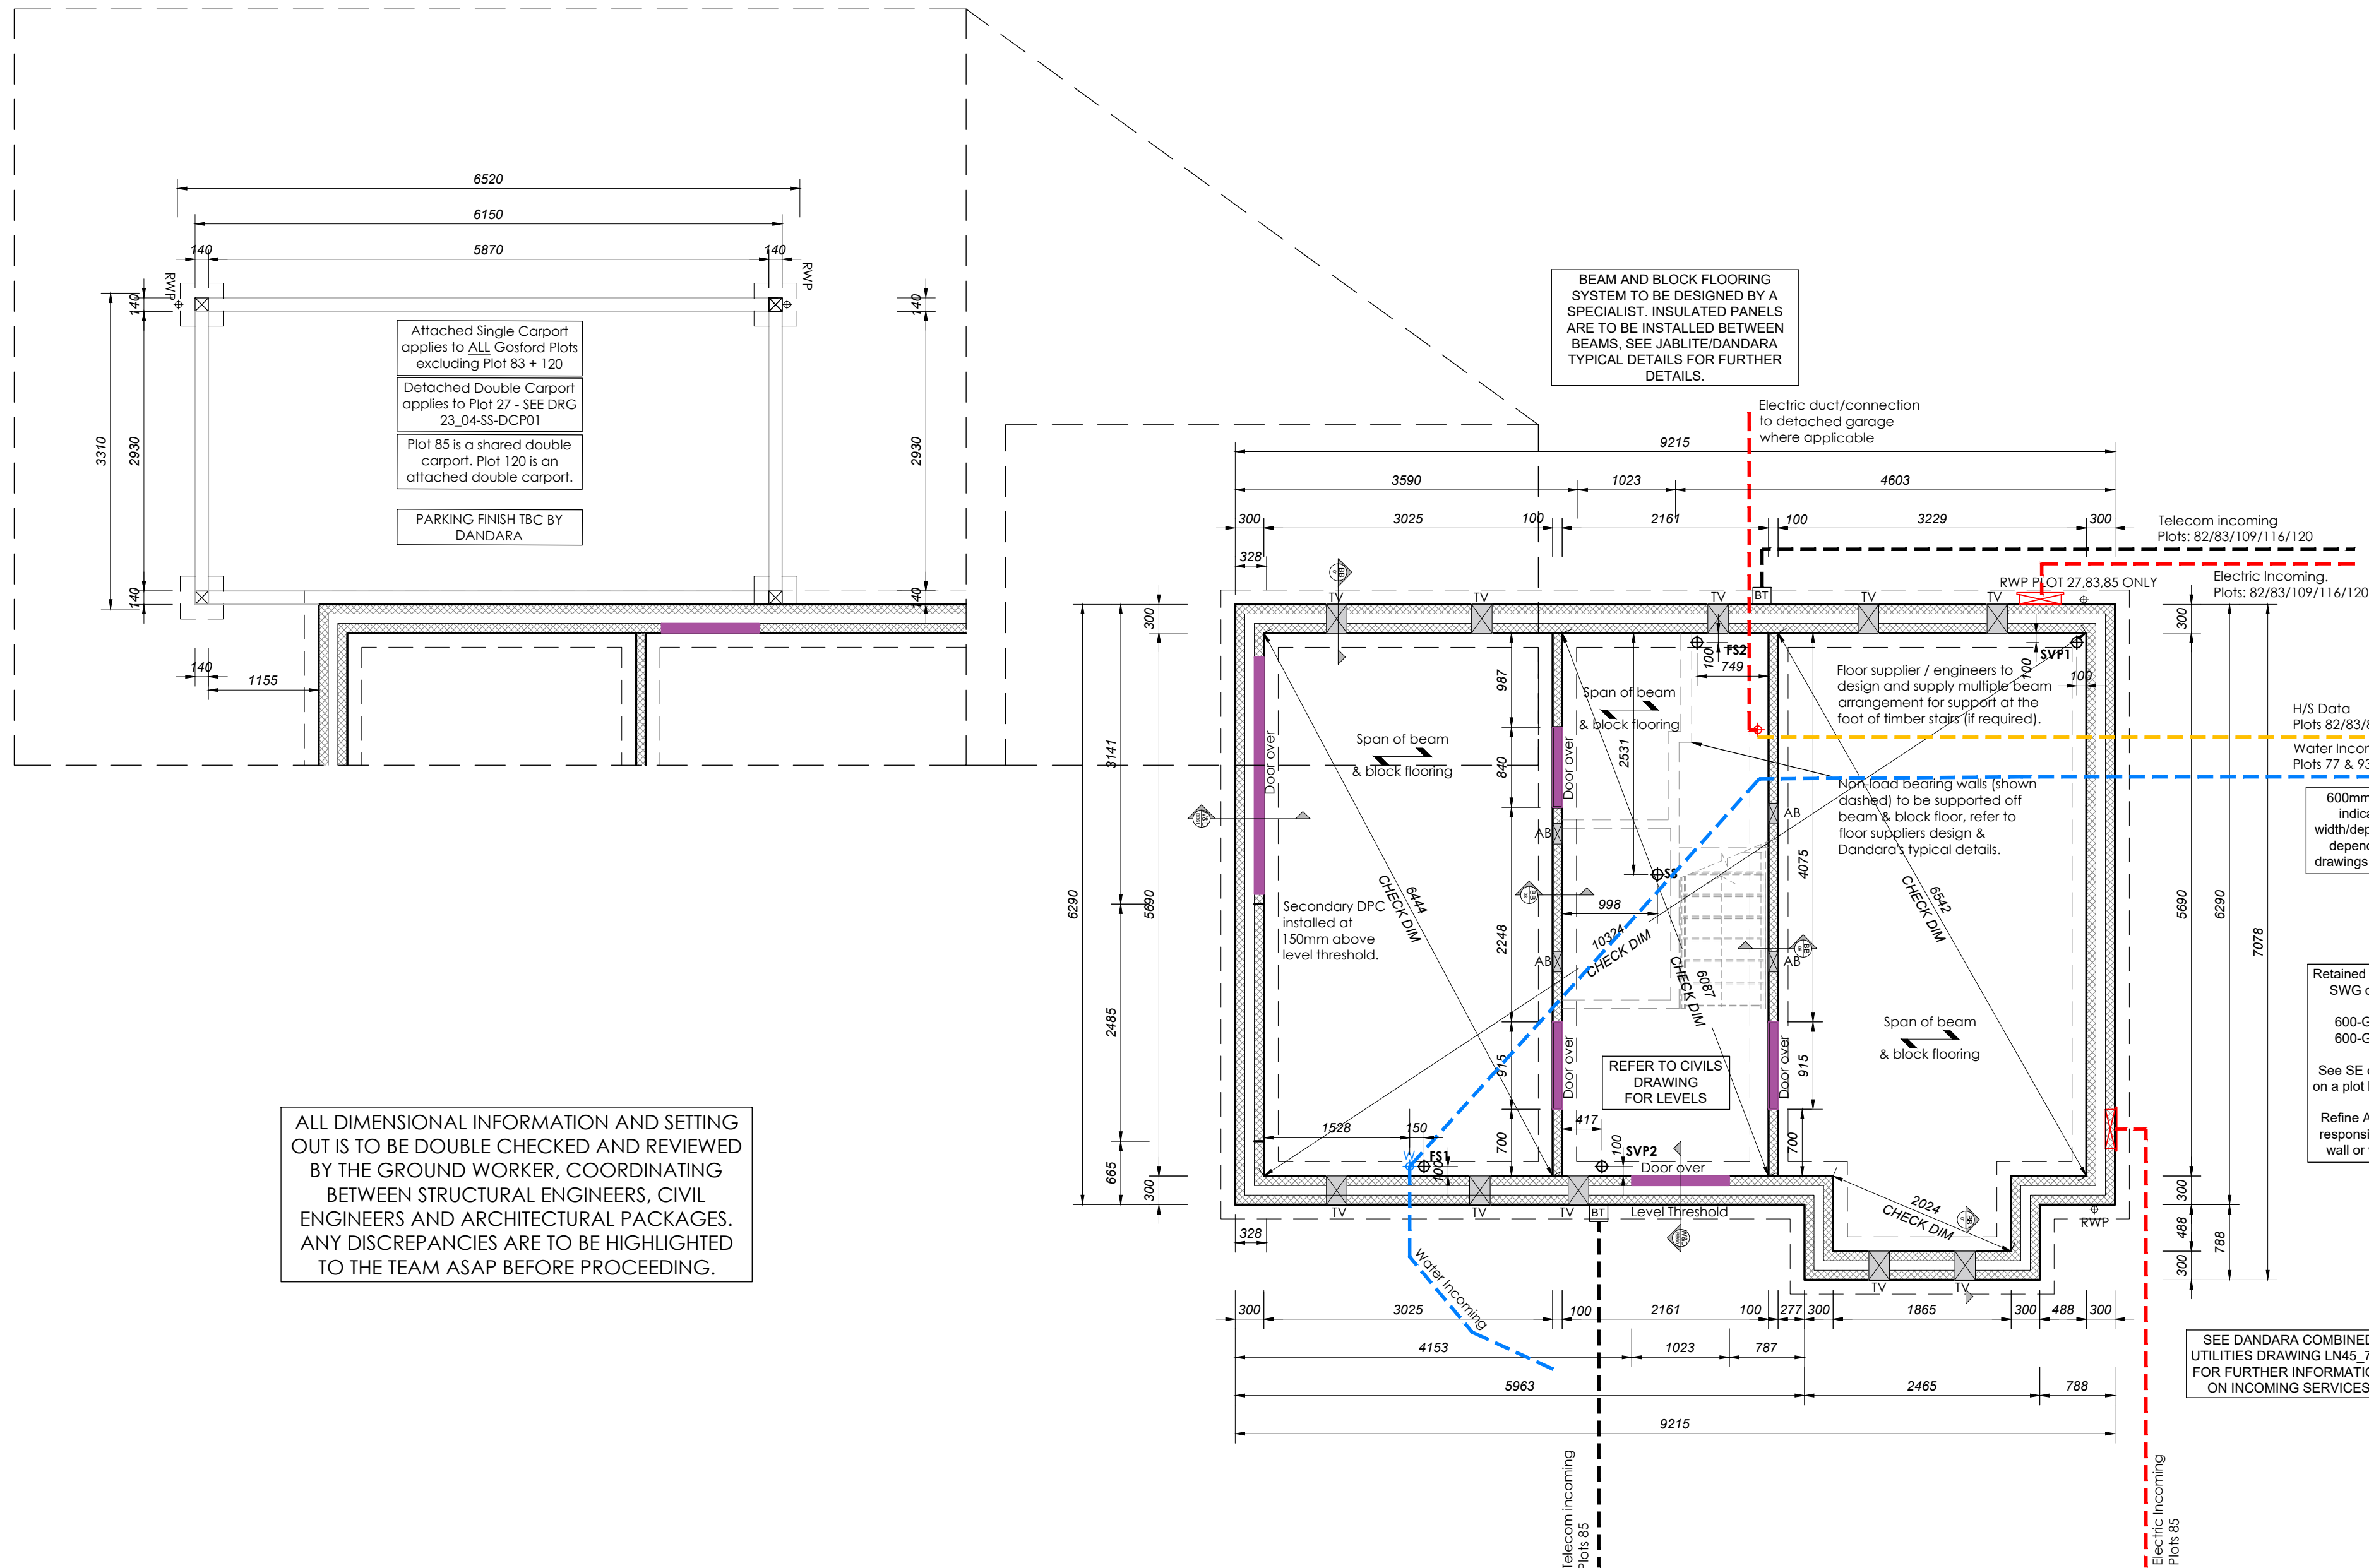
2) Please refer to engineers drawings for structural slab levels, lintels, foundation layouts and details.

3) Incoming Water, Gas, Electric and BT locations are shown indicative only and to be confirmed by utilities supplier. Services to run beneath ground floor slab were required

4) Ground below suspended floor to be free of plant/tree roots and treated with weed killer.

5) All below DPC brickwork to be the same as facing brickwork with a 3:1 mortar mix ratio. Soil investigation should be referred to on each site to consider ground conditions.

6) Floor finish to continue into doorway.

**PLOT LOCATION PLAN**

ALL DIMENSIONAL INFORMATION AND SETTING OUT IS TO BE DOUBLE CHECKED AND REVIEWED BY THE GROUND WORKER, COORDINATING BETWEEN STRUCTURAL ENGINEERS, CIVIL ENGINEERS AND ARCHITECTURAL PACKAGES. ANY DISCREPANCIES ARE TO BE HIGHLIGHTED TO THE TEAM ASAP BEFORE PROCEEDING.

SUBSTRUCTURE PLAN**Plots****AS - 120****OP - 82, 83, 85, 109, 116**

0.m 2.m 4.m

SCALE : 1:50 @ A1

C4	General Update to HT	0.04.2025	JB
C3	High speed date omitted, plot 109 added to electrical meter numbers.	31.05.2024	RJ
C2	Plot numbers updated to 120 scheme.	17.10.2023	HD
C1	Construction Issue	11.10.2023	RJ
REV.	AMENDMENT	DATE	BY

dandara

Courier House
80-84 Calverley Road
Tunbridge Wells
TN1 2UN

Tel 01892 800 802
Web www.dandara.com

PROJECT:
STEEL CROSS
For Dandara
By Refine Architecture

DRAWING:
GOSFORD V1
Substructure

STATUS:
Construction

SCALE: 1:50 @ A1	DATE: JAN 23
JOB No.: 23_04	NAME: AF
DRAWING No.: P0_3313H_101	Rev: C4