


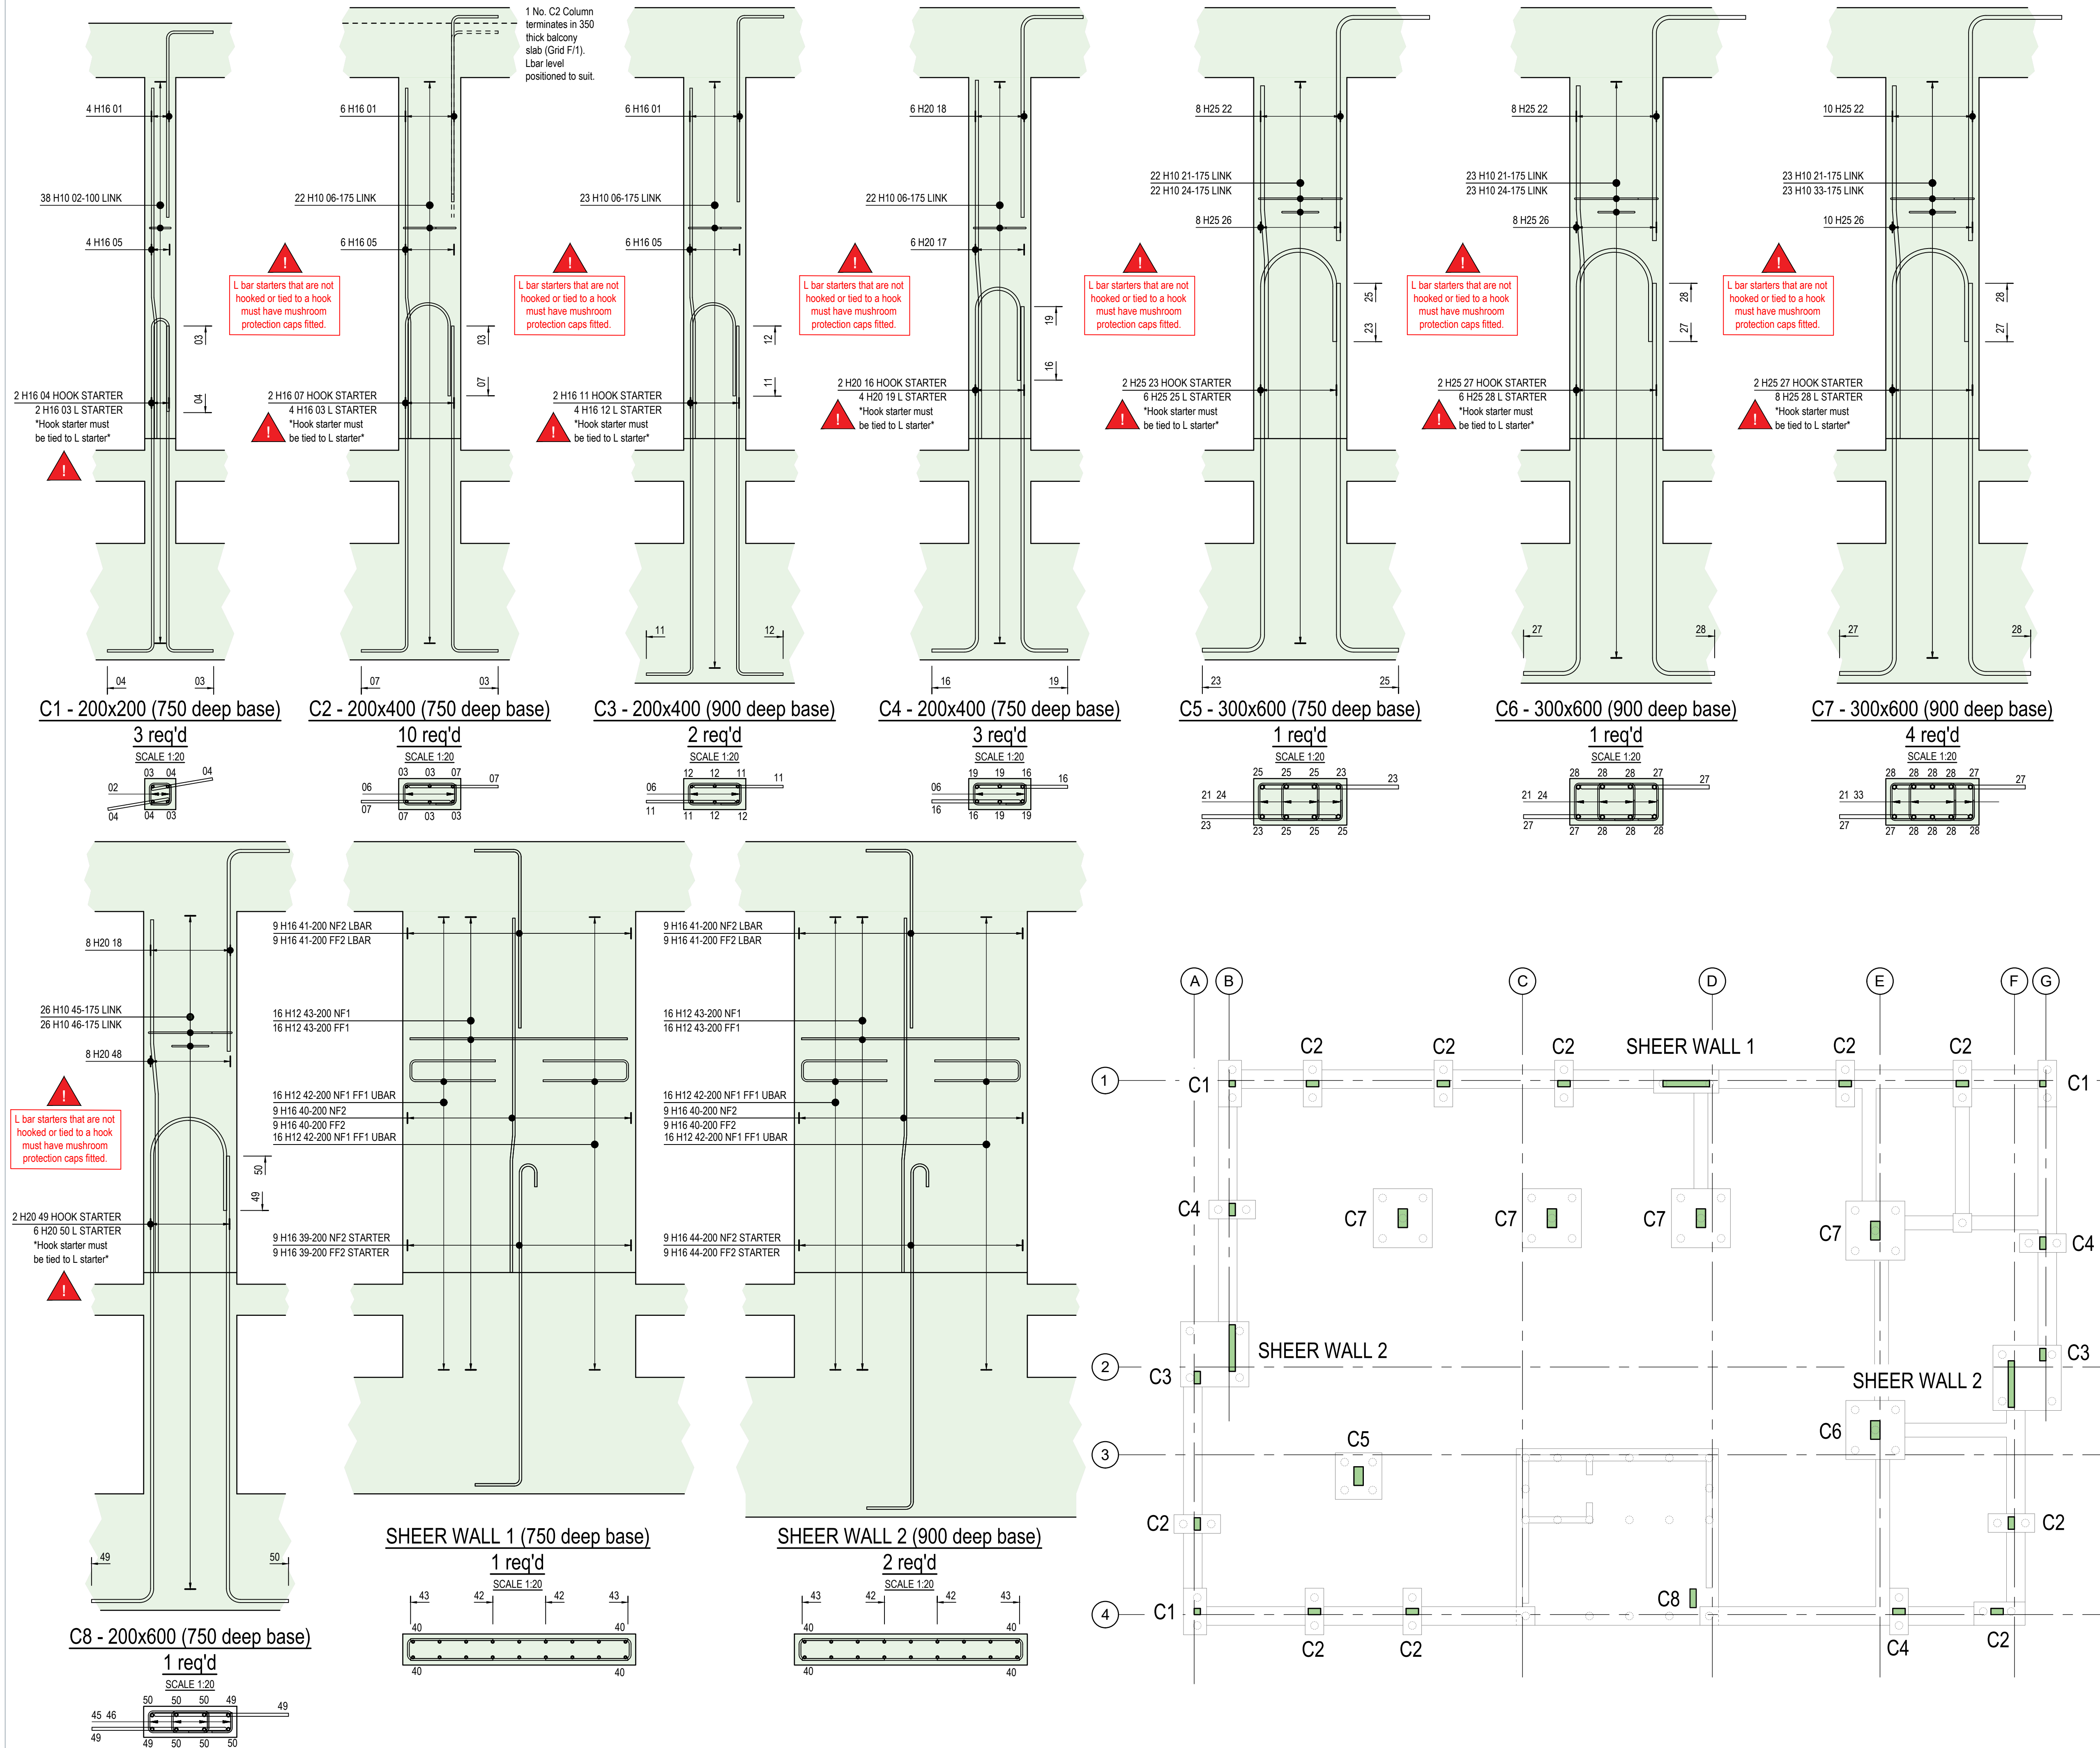

- GENERAL NOTES
- This drawing is to be read in conjunction with all relevant Eastwood CE drawings and specifications prefixed ECE-48176 / \*\*\*\*.
  - All concrete to be cured and protected from frost for a minimum of 7 days after casting.
  - Reinforcement to be Type 2 high yield steel to BS8666:2005.
  - Fabric mesh reinforcement to be Type 2 high yield steel to BS4483:2005.
  - Spacers to be individual proprietary concrete block spacers conforming to BS7973-1:2001.
  - Tying wires in exposed faces to be 1.2mm diameter stainless steel wire and 1.6mm diameter soft annealed iron wire elsewhere.
  - Cover to reinforcement:  
50mm Top & Sides  
70mm Bottom
  - Abbreviations  
NF - Near Face  
FF - Far Face
  - Abbreviations  
T1 - Top Layer of reinforcement  
T2 - Second from top layer of reinforcement  
B1 - Bottom layer of reinforcement  
B2 - Second from bottom layer of reinforcement
  - Refer to bar bending schedules SA00394-5155-S-BLOCKB-BBS sheet 01-03 for reinforcement details.


**NOTE**  
UNPROTECTED REINFORCEMENT.  
HAZARD FROM EXPOSED ENDS AND  
STARTER BARS.

| C   | Reinforcement amended in line with latest Architectural layout Issued For Construction | DR  | AF  | 26.04.24 |
|-----|----------------------------------------------------------------------------------------|-----|-----|----------|
| B   | Issued For Information.                                                                | DR  | AF  | 19.04.24 |
| A   | First issue.                                                                           | DR  | AF  | 16/02/24 |
| REV | DESCRIPTION                                                                            | SIG | CHK | DATE     |

CALA HOMES (THAMES) LIMITED

BROOKLANDS COLLEGE  
WEYBRIDGE

BLOCK B COLUMN & SHEER WALL  
RC DETAILS

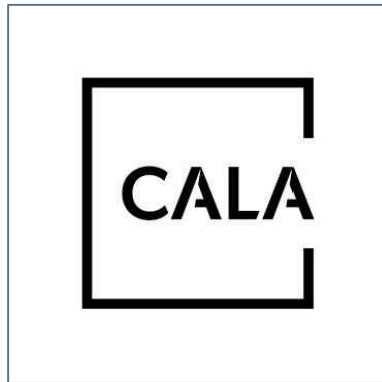

|                                                 |             |                |     |
|-------------------------------------------------|-------------|----------------|-----|
| ECE PROJECT No                                  | SCALE AT A1 | Drawing Status | REV |
| 48176                                           | 1:20        | CONSTRUCTION C |     |
| Project<br>SA00394 - 5154 - S - BLOCKB - COLUMN |             |                |     |