


Fixers Note:

GF

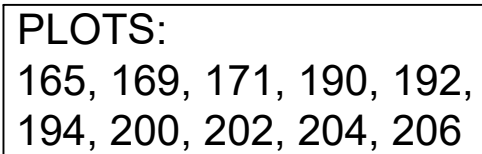


HANDED:
168,174,177,179,181,
183,197

Loading Allowances		
Live Load	1.50	kN/m ²
Dead Load	1.68	kN/m ²
Blanket Partition Load	0.50	kN/m ²
Partition Load (U.N.O)	0.00	kN/m
		Timber Stud

JetFloor Make Up			
Beam	150mm	Jetfloor	Grey
Insulation	80mm	EPS Overlay	Grey
Topping	70mm	Structural Topping	
Bearing	FFL -	300	
U Value	0.000	W/m²k	

Jetfloor Block Key		
Wide Block	W	485mm Beam Spacings
Narrow Block	N	295mm Beam Spacings
Cut Sheet	C	Tolerance Cut Sheet. No greater than 294mm



Site Address

Brooklands College
Weybridge
KT13

Project Number	00-28677
----------------	----------

Type Description	Rev
HT4 Semi Laurel	A

Bill of material			
NR.	ITEM		
9	BT02	BEAM	3100mm
8	BT02	BEAM	3400mm
2	BT02	BEAM	3450mm
6	BT02	BEAM	3550mm
5	BT02	BEAM	3650mm
6	BT02	BEAM	3700mm

J100P (grey EPS 18kg/m ³)	0.94
---------------------------------------	------

JPN (grey EPS 26kg/m ³)	37.57
-------------------------------------	-------

JPW (grey EPS 26kg/m ³)		59.56
Coursing blocks		
SKCH 20N	N/A	N/A
SCR 10N	N/A	N/A
SCR 20N	N/A	N/A
TS100W 7.3N	44	N/A
TS100N 7.3N	36	N/A
JI100 7.3N	66	N/A
TS140W 7.3N	N/A	N/A
TS140N 7.3N	N/A	N/A
JI140 7.3N	N/A	N/A
EX100L	N/A	N/A
EX140L	N/A	N/A
EX100W	N/A	N/A
EX100N	N/A	N/A

Total Floor weight : 4.10 tonnes
Total Floor Area : 73 m2
Total m3 poly block : 57.782 m3
Floor weight ex blocks: 4.10 tonnes
Heaviest unit : 122.58 Kg

Overlay sheets		
380P: 23.76 pc		

Ancillary items		
Airbrick Timloc	: N/A	P34 : 56 pc
Airbrick Manthorpe	: N/A	
BC1100	: N/A	
BC1140	: N/A	

Site Address	Brooklands College Weybridge KT13
--------------	---

Date	19/07/24	Scale	1:50	Drn.	RU
------	----------	-------	------	------	----

Project Number	00-28677
----------------	----------

Type Description	Rev
HT4 Semi Laurel	A