


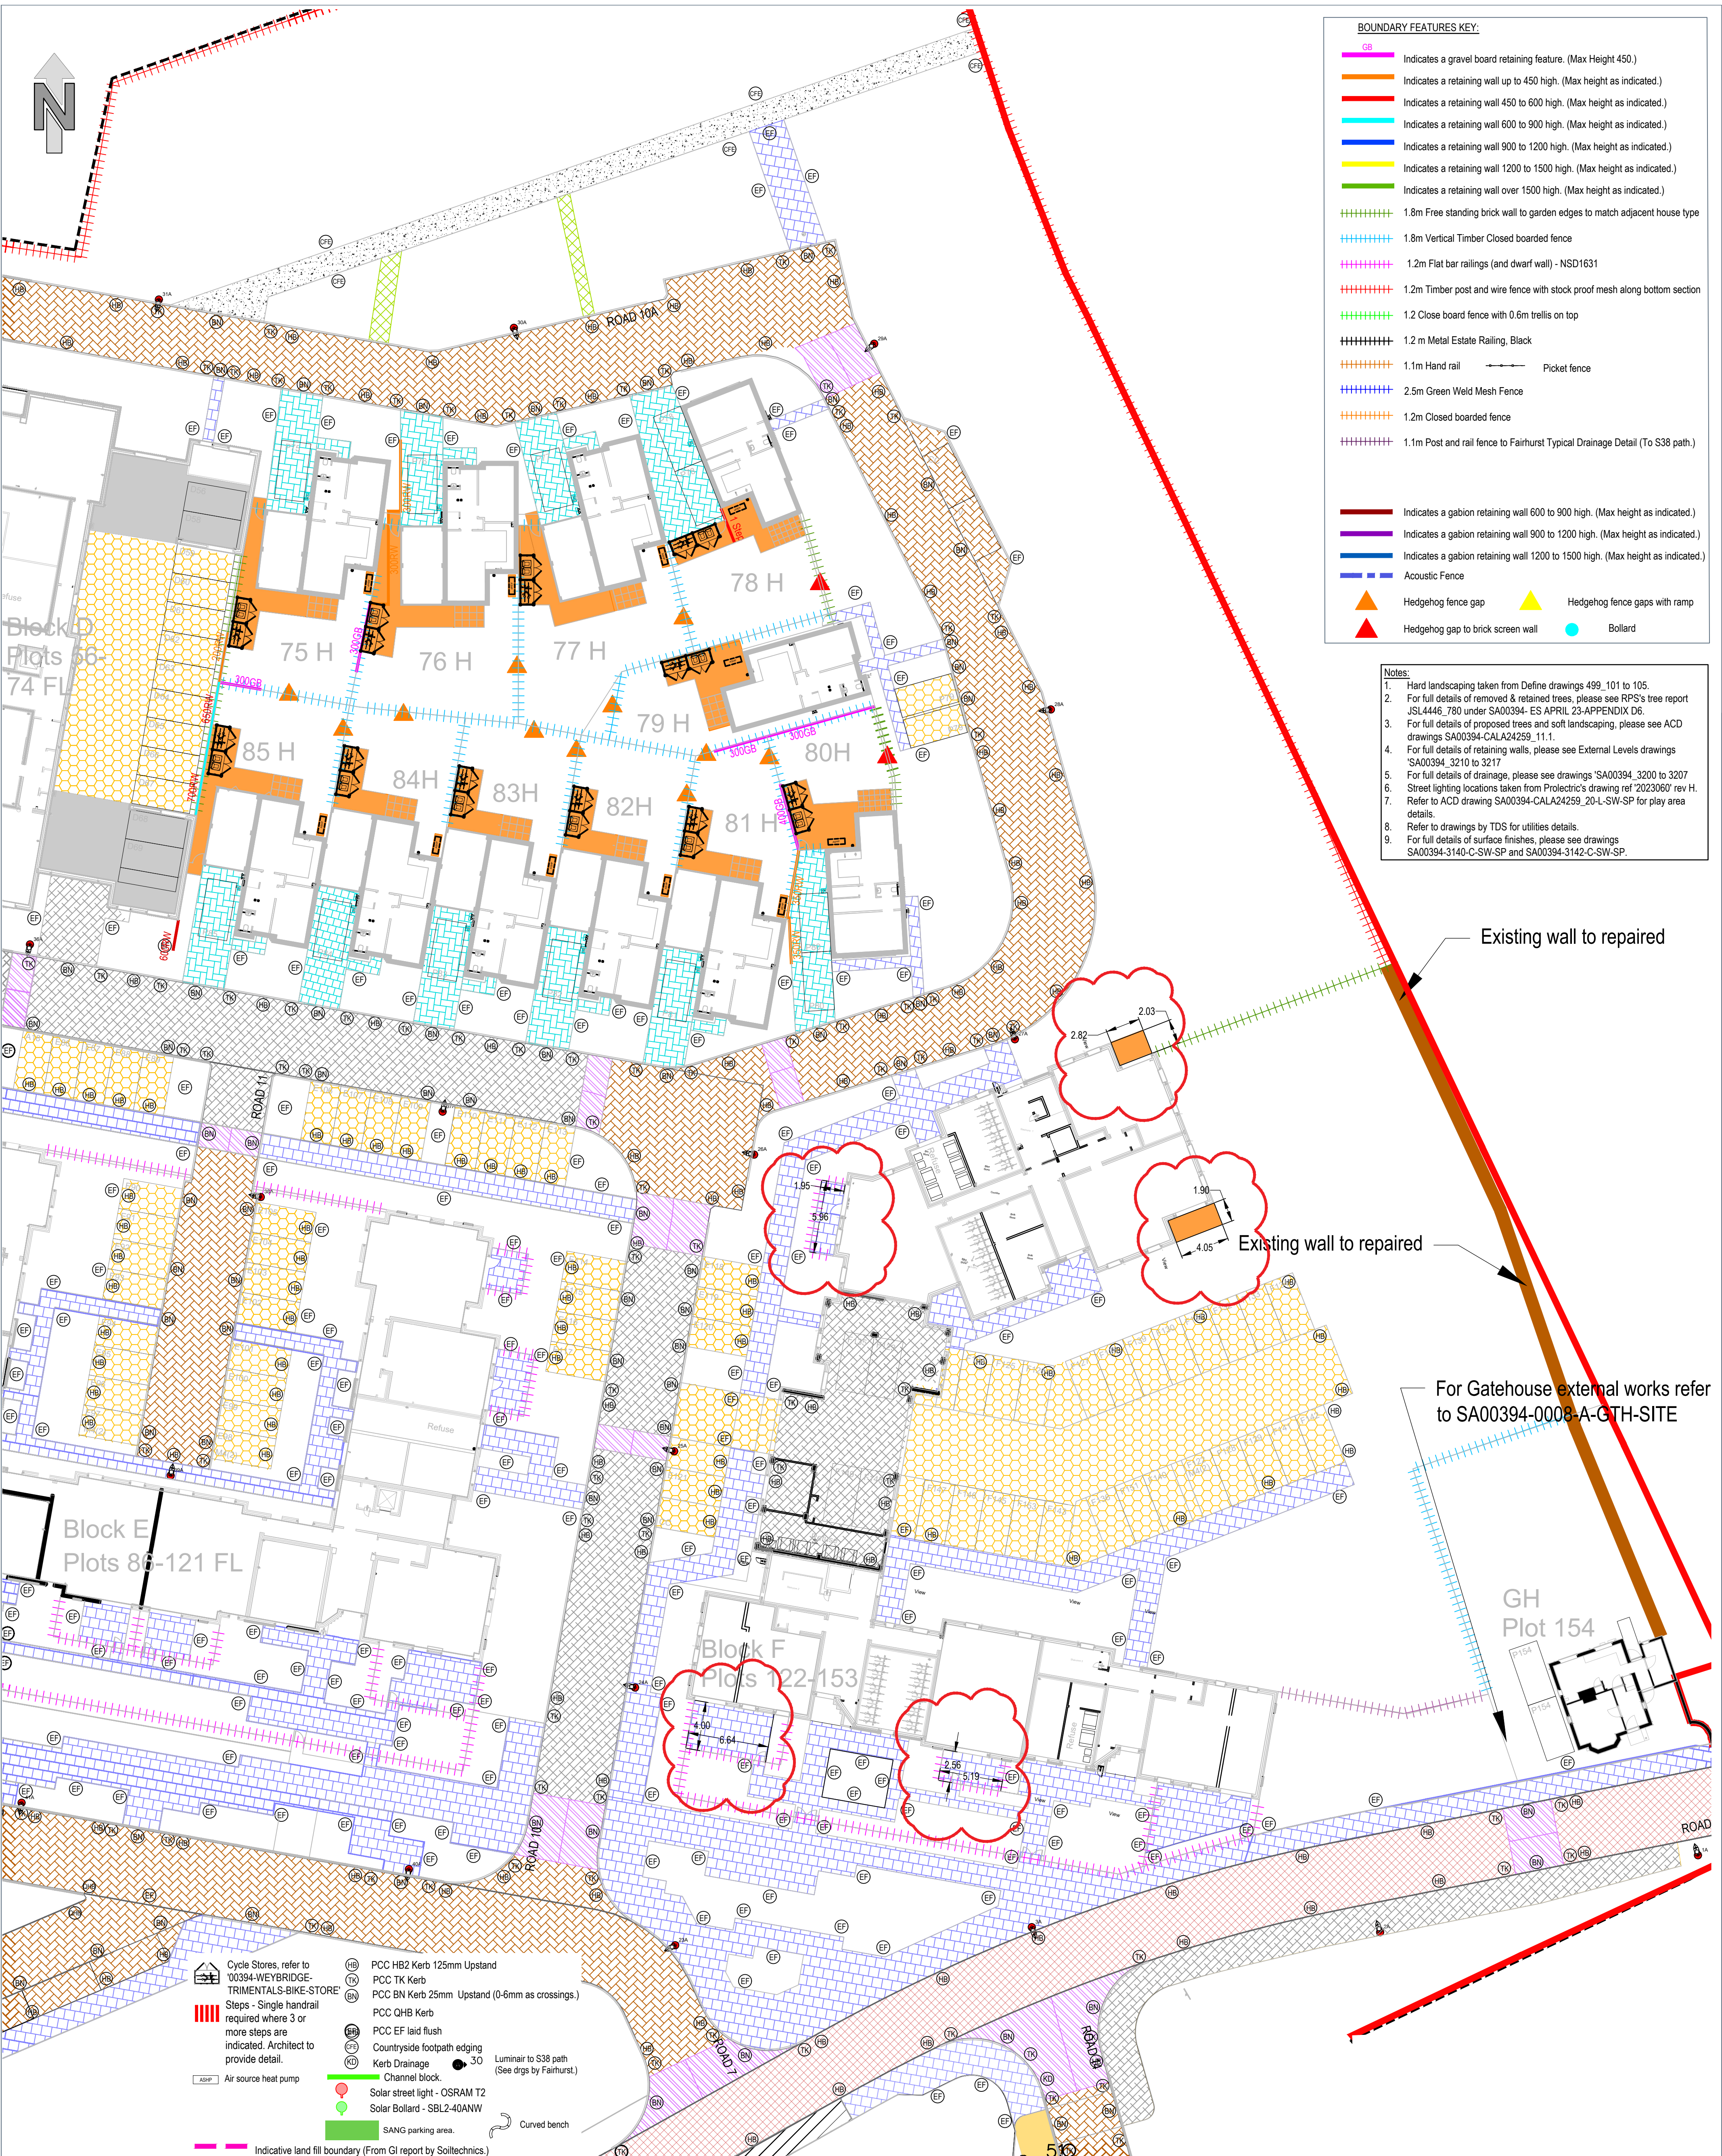

KEY:	REV	DESCRIPTION	SIG	CHK	DATE
Tarmac surfacing to highway; finish to engineers specification.	R	Latest DWG issue to CALA.	JAE	-	07.07.2025
Shared surface; Concrete block paving 80mm; Colour traditional.	S	Bin stores reinstated	OW	IS	20.10.2025
Parking bays Concrete block / tegula paving; Colour charcoal; 200x100x60mm; Use permeable paving where required. Refer to Engineering layout.	T	Amendments outside Block F for sales arena, block F ground floor patios reinstated as missing on the north side of Block.	OW	CP	24.03.2026
Permeable paving - see drawings 3200-3207 for full details	U	Block F Patio Dims added.	OW	CP	02.04.2026
College boundary footpath - concrete paving					
Footway; Concrete sett paving; Colour harvest; 240/120x160mm.					
Accent banding; Sett paving 150/100x100mm (Rumble Strip) - see typical details					
Paving slabs to rear patios and paths; Concrete; 600x600mm.					
Undercroft Parking					
Self binding gravel - color Golden Bluff					
S38 Path/Cycleway					
No Dig Landscaping due to root protection.					
Hand Dig due to root protection.					
No Dig due to root protection.					
No Dig, Reuse Sub-Base					
Stepping stone					
Road to be resurfaced once works completed.					

DWG FILE ISSUED TO CALA HOMES AS REQUESTED. ANY UPDATES UNDERTAKEN ON THIS DRAWING FROM 07.07.2025 ONWARDS ARE THE RESPONSIBILITY OF CALA HOMES.

CALA HOMES (THAMES) LIMITED

BROOKLANDS COLLEGE WEYBRIDGE

EXTERNAL WORKS SHEET 2 OF 8



St Andrew's House
23 Kingfield Road
Sheffield, S11 9AS

T: 0114 255 4554
E: mail@eastwoodce.com
eastwoodce.com

ECE PROJECT No 48174 SCALE AT A1 Drawing Status CONSTRUCTION U

Project SA00394-3221-C-SW-SP