


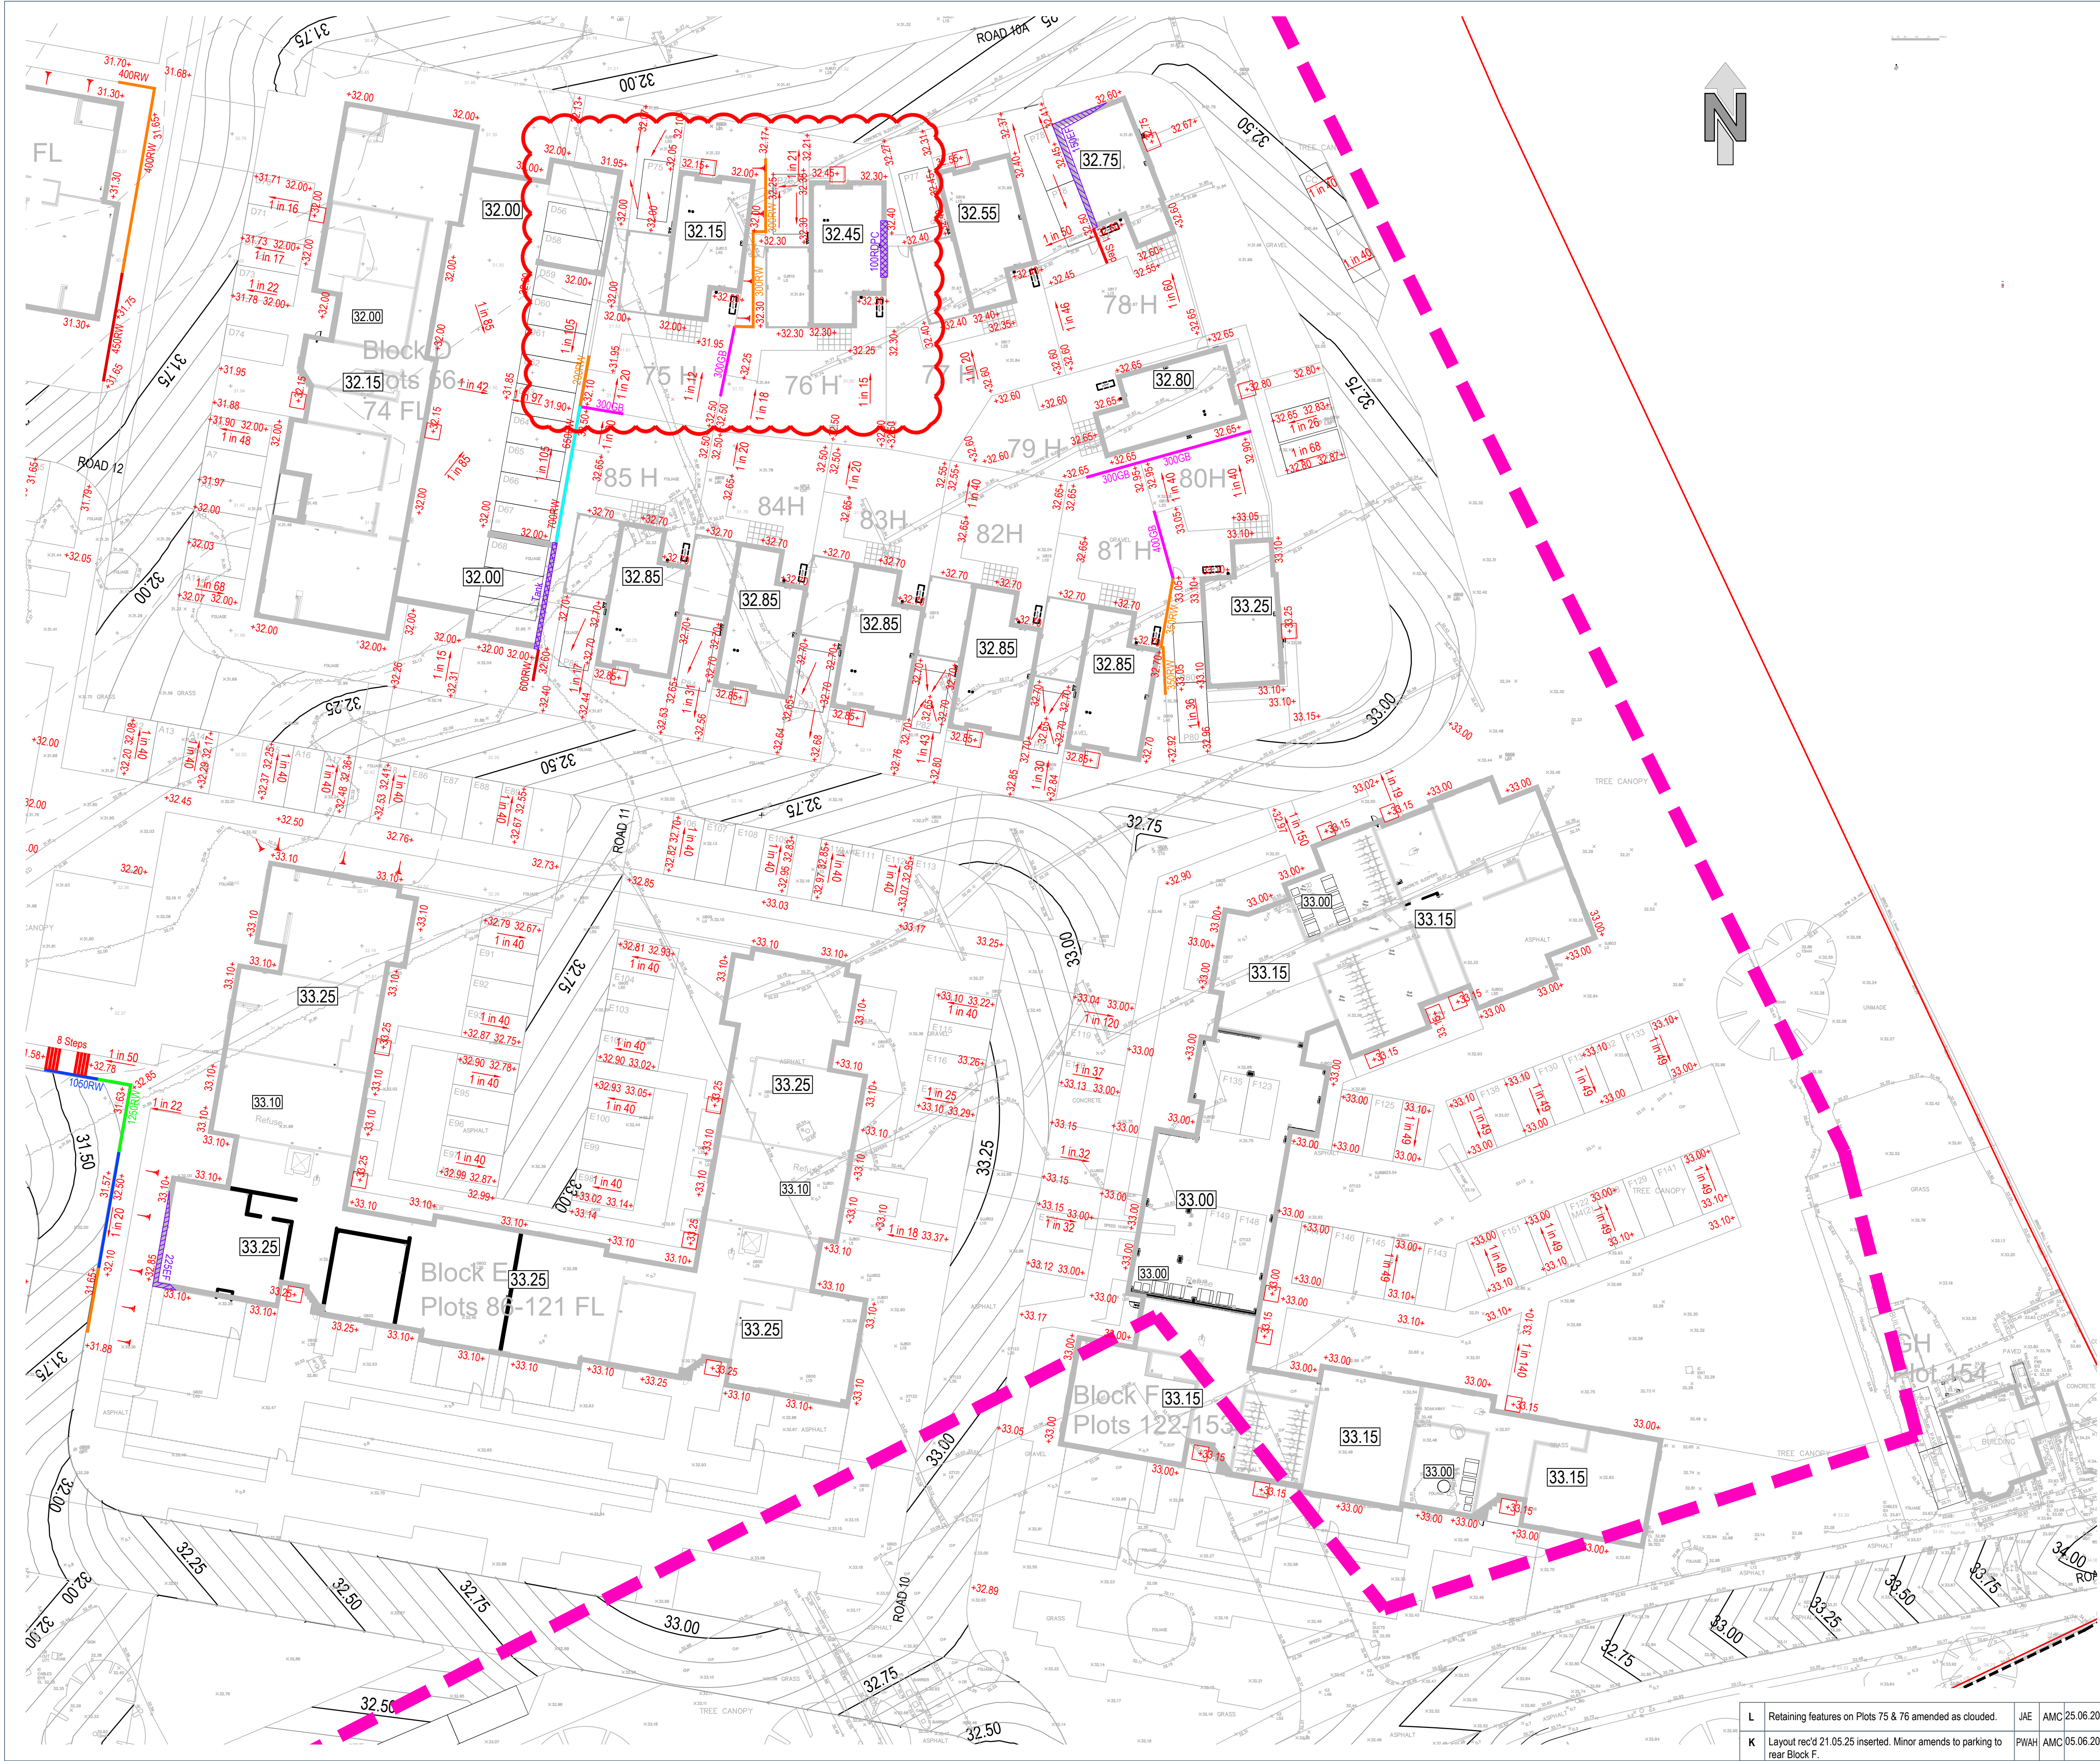

INFORMATION WITHIN THIS DRAWING IS NOT NECESSARILY PRODUCED TO SCALE.
ALWAYS USE FIGURED DIMENSIONS AND CO-ORDINATES - IF IN DOUBT, ASK.

NOTES

- KEY:**
- Indicates proposed finished floor level.
 - Indicates area of extra facing brickwork.
 - Indicates raised damp proof course.
 - Indicates a gravel board retaining feature. (Max Height 450.)
 - Indicates a retaining wall up to 450 high. (Max height as indicated.)
 - Indicates a retaining wall 450 to 600 high. (Max height as indicated.)
 - Indicates a retaining wall 600 to 900 high. (Max height as indicated.)
 - Indicates a retaining wall 900 to 1200 high. (Max height as indicated.)
 - Indicates a retaining wall 1200 to 1500 high. (Max height as indicated.)
 - Indicates a retaining wall over 1500 high. (Max height as indicated.)
 - Indicates a gabion retaining wall up to 450 high. (Max height as indicated.)
 - Indicates a gabion retaining wall 450 to 600 high. (Max height as indicated.)
 - Indicates a gabion retaining wall 600 to 900 high. (Max height as indicated.)
 - Indicates a gabion retaining wall 900 to 1200 high. (Max height as indicated.)
 - Indicates a gabion retaining wall 1200 to 1500 high. (Max height as indicated.)
 - Indicates a gabion retaining wall over 1500 high. (Max height as indicated.)
 - Indicative fall. (Max 1:12 unless shown otherwise.)
 - Indicates an embankment. (Max 1:3)
 - Steps
- Indicates steps. Steps to be in accordance with Part M requirements. Where flights of steps have three or more treads, a suitable handrail is to be provided. Flights must have a clear width of 900mm minimum. No flight to exceed 1800mm high. Landings to have a minimum length of 900mm.
- Indicative land fill boundary (From GI report by Soiltechnics.)

External works assumptions:
Masonry retaining walls:
Standard construction details for 600, 900, 1200, 1500, 1800, etc retained height are available.
Foundation details within landfill areas to be confirmed by Structural Engineer.
Drive gradients shown are maximum gradients. Spot levels take into account top and bottom roll-overs as appropriate. Average gradient may be flatter than shown.
Max garden gradient beyond patio: 1:20

See below for continuation.

J	Layout rec'd 01.04.25 inserted.	PWAH	AMC	04.04.2025
H	Layout rec'd 10.01.25 inserted. Plot 75 rear garden boundary and Sang car park/footpath updated to suit latest layout. FFLs to bin stores to blocks A, C, D, E and F clarified as 150 below habitable FFLs.	PWAH	AMC	10.02.2025
G	Layout rec'd 29.08.24 inserted.	PWAH	AMC	11.09.2024
F	Levels around sports hall amended to suit revised roads. Steps introduced to West side of Block E. Revised layout (25.07.2024) inserted. Abeyance note deleted from title block.	PWAH	AMC	31.07.2024
E	Note re abeyance list amended.	PWAH	CAT	17.04.2024
D	Minor amendments to key to clarify.	PWAH	AMC	27.03.2024
C	Revised to suit new layout. Viewpoint amended to show plot 78.	PWAH	AC	19.02.2024
B	Plots 75 - 85 amended. Sheet key added.	PWAH	AMC	19.01.2024
A	First issue.	PWAH	AMC	08.12.2023
REV	DESCRIPTION	SIG	CHK	DATE

CALA HOMES (THAMES) LIMITED

BROOKLANDS COLLEGE
WEYBRIDGE

EXTERNAL LEVELS SHEET 2 OF 8



Eastwood
CONSULTING ENGINEERS

St Andrew's House
23 Kingfield Road
Sheffield, S11 9AS

T: 0114 255 4554
E: mail@eastwoodce.com
eastwoodce.com

ECE PROJECT No	SCALE AT A1	Drawing Status	REV
48174	1:250	CONSTRUCTION L	
Project	SA00394-3211-C-SW-SP		
L	Retaining features on Plots 75 & 76 amended as clouded.	JAE	AMC 25.06.2025
K	Layout rec'd 21.05.25 inserted. Minor amends to parking to rear Block F.	PWAH	AMC 05.06.2025