

381.54 757.5 4 550.0


span

5239.5

ORWP

Joist Plan

1541.0

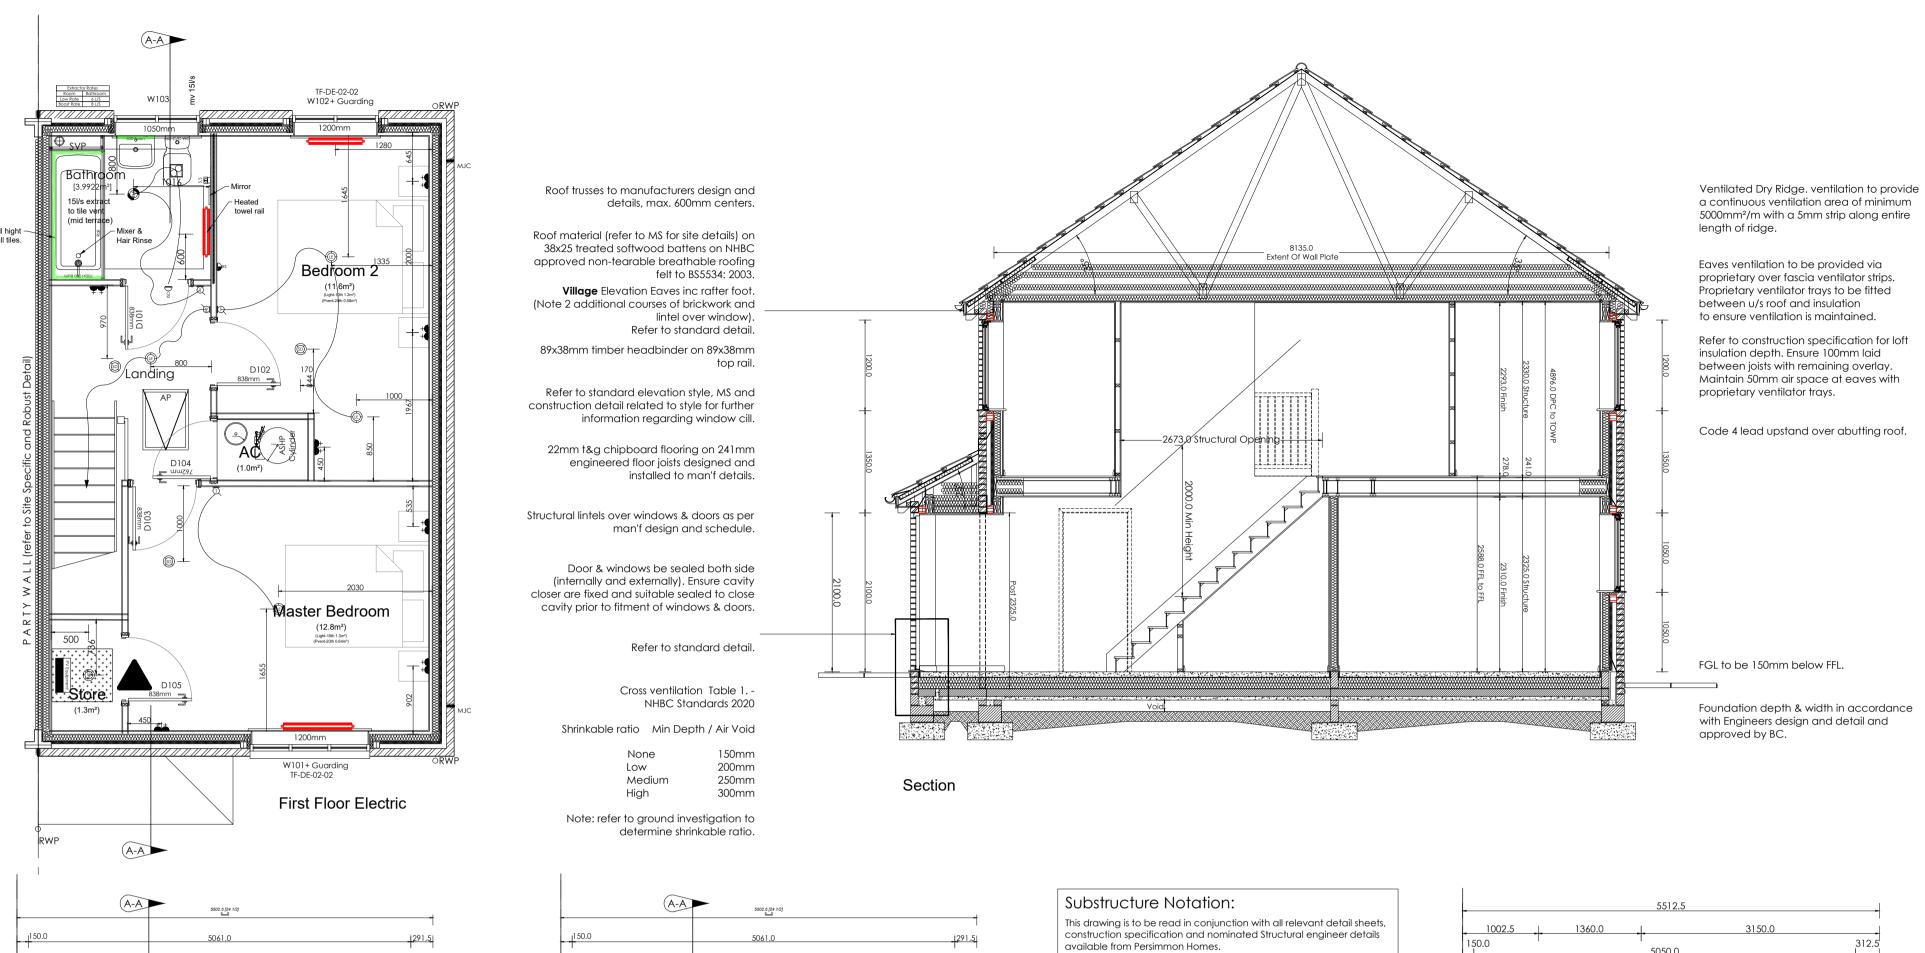

Floor Construction:

Cailing Panatrations

details.

TJI Joist: 241mm deep TJI Joist designed and installed to manufacturers

TJI Joist: 241mm deep TJI Joist designed and installed to manufacturers


All peripheral service voids flanking external wall to receive bearing


All waste pipes to run in floor void to be insulated in 75mm insulation

All racking walls to be fully supported in accordance with joist

manufacturers and structural engineers details.

timber fixed to external wall to support floor deck over.

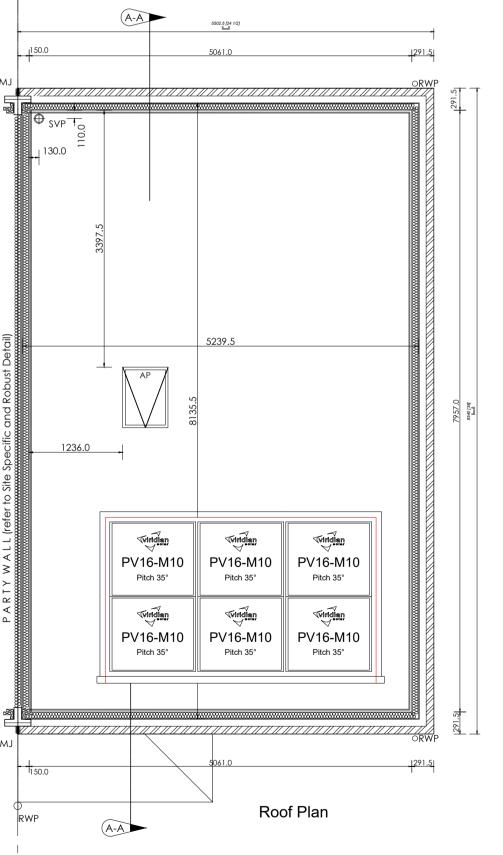

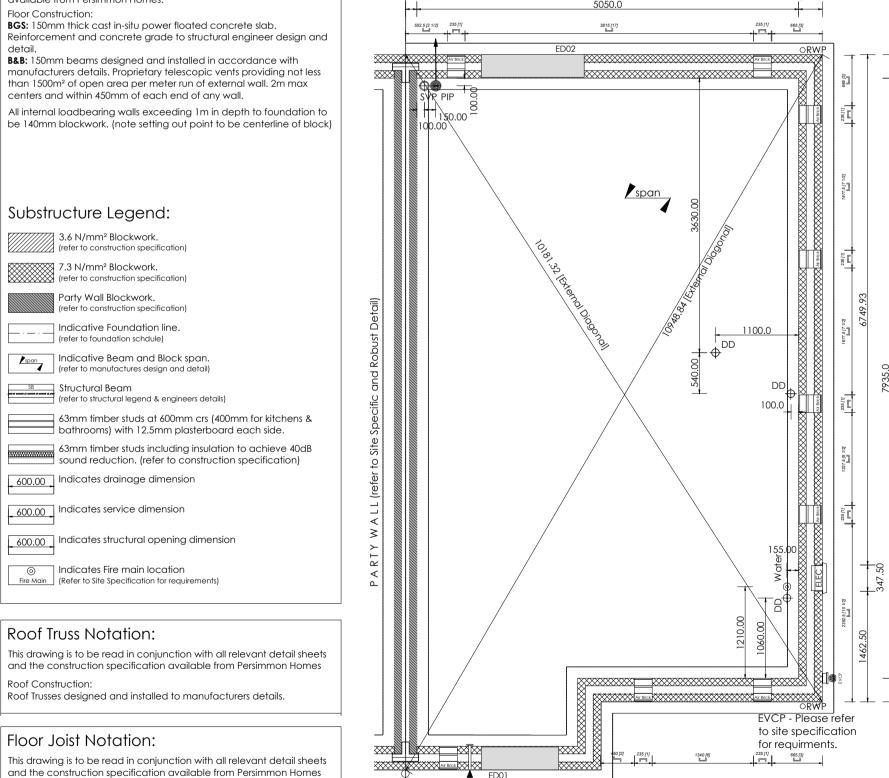

Sub Structure Plan

M.E.P Plan Notation:

This drawing is to be read in conjunction with all relevant detail sheets and the construction specification available from Persimmon Homes Please refer to all 3rd party information for RAD sizing (width and heights)

All lighting to be provided with energy efficient lumens and luminaires Ceiling lighting to be positioned central to room unless otherwise stated. Extractor fans to be wall or ceiling mounted as dimensioned, all ducting to be rigid duct and terminated at a brick terminal (dimensioned on floor plans and elevations).

Isolator switch to be positioned centrally above entrance door of the room fan is to be operational.

Underside of RAD to be set 200mm above FFL

M.E.P Plan Legend:

High Level 13amp Socket (1500mm above FFL)

- Medium level 13amp socket Including USB where stated (1200mm above FFL)
- Low level 13amp socket Including USB where stated (450mm above FFL)
- Low level 13amp external IP66 socket (450mm above FFL)
- Cooker control spur
- Room Thermostat
- Extractor fan isolator switch Extractor fan isolator swiicri
 (100mm above entrance door of the room fan is to be operational)
- Fuse spur 13amp switched spur
- TV Point
- Kitchen Grid Switch managing all appliance sockets
- Single 13 Amp switched appliance socket outlet at low level
- § Single 13 Amp switched appliance socket outlet at high level (operated by grid switch)
- Media Plate
 (2x Double Sockets, TV)
- FiberNest Router Location
- FiberNest ONT Box Location ⊨== Fibre broadband inlet
- Cat5 Ethernet point (routed back to Fibernest location)
- Light Switch (demonstrated as 2 way)
- Pendant Light Fitting Low Energy
- Batten Light Fitting Low Energy
- Low Energy Wall Light Fitting
- Recessed downlight (sealed unit to all wetroom
- External wall light inc PIR Low Energy
- (dusk/dawn PIR subject site building regulation or Finishing Touch option) © Ceiling mounted extractor fan
- Wall mounted extractor fan
- Safety detectors:
- (CO Carbon Monoxide detector, HD Heat detector, SD Smoke detector,

 (MD Multi sensor detector 350mm min to any light fitting)
- External Alarm Bell Box location
- Consumer Unit.
 (switches 1350-1450mm above FFL)
- Sprinkler Outlet.
 (refer Site Specification & 3rd party man'f information for detailed locations)
- Electrical Vehicle Charging Point (Refer to Site Specification)
- Photovoltaic Meter
- Photovoltaic Meter (Refer to Site Specification)

 Bar Light
 (Refer to Site Specification) Lockable Isolator Switch
- (Refer to Site Specification)
- External Door bell (Install and location subject to Finishing Touch option)
- Internal Door bell Sounder
 - External Junction box Shaver socket (Include wire for rear external light)

 Standard Socket

 (Refer to Site Specification)

11-07-25 Revised to match affordable housing finishes specification D 26-03-25 Updated to Reggie's comments, Drawing naming, External 10-03-25 CU moved to Cup'ed, (300mm), Cavity socks added. sub's revised to 110mm cavity, window and door schedule updated. AC cup'ed updated. A 19-09-24 Sola removed, Rads revised. Rev. Date By Chk. Amendment Status CHARLES CHURCH LAND AT BASSETTS FARM, HORSMONDEN, KENT A House type M&E and Section, Sub's, Joist, Truss Date 11/7/25 Drawn By PVS Scale Drawing No. 634-Con-301 Rev G